

ClearLink® Multiband Omnidirectional Antenna

General Information

Westell's multiband omnidirectional antenna is a wireless transmitting/receiving antenna that works exceptionally well in all horizontal directions. Used in most RF wireless devices such as mobile phone devices and wireless routers.

Product Highlights

- Multiband Design
- Flexible Mounting Options
- Symmetric Construction
- Suitable for Wall Mounting

Applications

- CDMA, GSM, DCS, 3G/UMTS, LTE
- In-building Coverage

Frequency Range

- 698-960 MHz
- 1710-2690 MHz

Electrical Specifications

Horizontal Beamwidth	Omnidirectional
Gain	
698-738 MHz	2 dBi
738-818 MHz	1 to 2 dBi
818-960 MHz	1 to 2 dBi
1700-2690 MHz	2 to 4 dBi
Polarization	Vertical
Impedance	50 Ohm
VSWR/Return Loss	
698-738 MHz	2.0/9.5 dB
738-818 MHz	1.8/10.9 dB
818-960 MHz	1.5/14.0 dB
1700-2690 MHz	1.4/15.5 dB
PIM, 3rd order, 2 x 20W	-153 dBc
Max Input Power	50 Watts (2W typical)

Specifications subject to change without notice.



Multiband Omnidirectional Antenna

Ordering information

Part Number	Descriptions
CS03-011-429	ClearLink-O/698-2.7K/N
CS03-011-429-02	CLEARLINK-O/698-2.7K/4310 PORCELAIN WH

Mechanical Specifications

Case Material	ABS with UV Protection
Operating Temperature	-40° to +70° C
Dimensions	8 Dia. x 4.5 H in.
Weight	1.6 lbs
Connectors	N-Female
Pigtail	Low PIM plenum rated cable
Standard Mounting Style	Ceiling
Universal bracket included for additional mounting options	




WESTELL.COM



ClearLink® Multiband Omnidirectional Antenna

Sample Antenna Patterns*

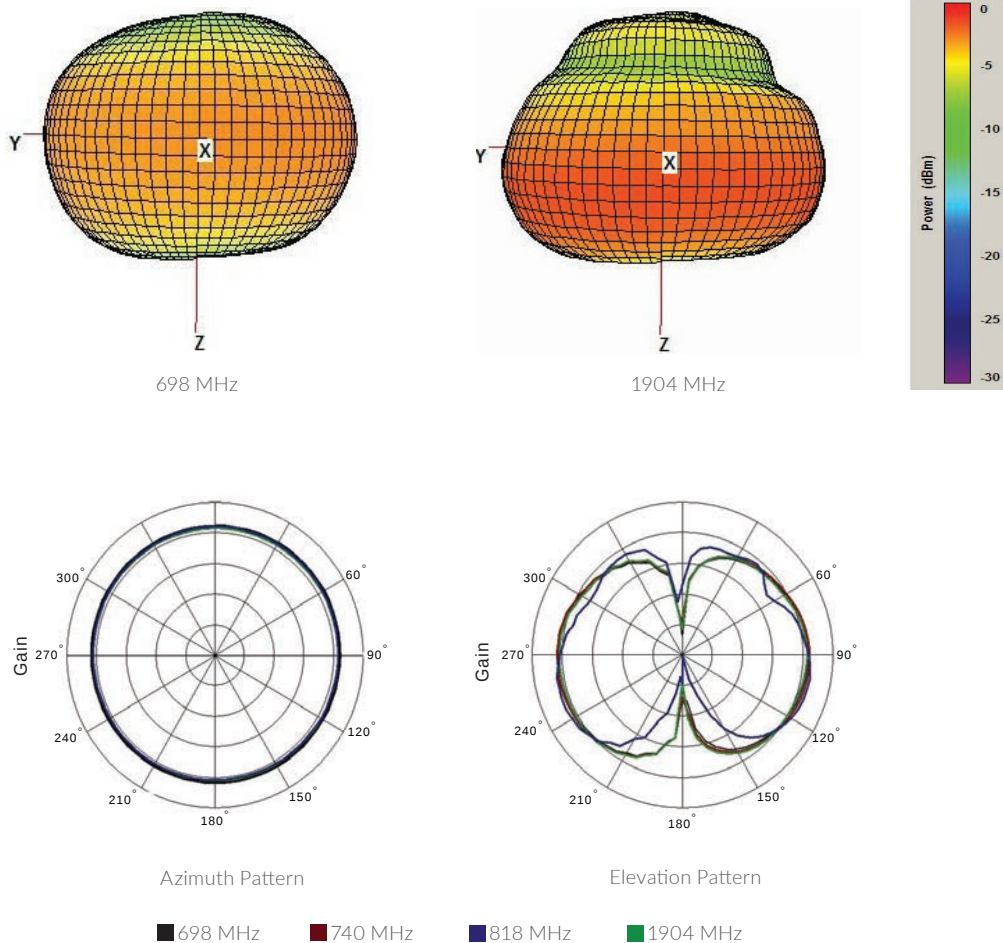

* Additional patterns with enlarged images are available upon request.



Copyright © 2018 by Westell, Inc. All Rights Reserved. Westell, ClearLink, Kentrox, and Optima Management System are registered trademarks of Westell, Inc. All other names are trademarks of their respective owners. Information is correct at time of printing and is subject to change without notice. Westell, Inc. is an Equal Opportunity/Affirmative Action employer.

WESTELL.COM

IBW-CS03-011-429_2-DS-091218

Page 2 of 2