

NE075AC48ATEZ Infinity Rectifier



Advanced Technology to Simplify Your Network

The OmniOn Power™ NE075AC48ATEZ Infinity Single-phase Rectifier is designed to efficiently transform energy from any AC source into the 48 Volt DC power needed for Central Office, MTSO and wireless cellular sites. This means that one single rectifier can be used globally to meet all your 48V powering needs.

Efficiency is market leading for diode protected, true hot pluggable, 48 Volt rectifiers. The NE075AC48ATEZ offers a powerful combination of efficiency, network simplicity and reliability.

A True System Solution

Infinity Rectifiers are part of the proven Infinity Power System platform particularly designed to meet the unique needs of the ever-changing network landscape.

- Monitoring / control – the built in microprocessor controls and monitors all critical rectifier functions and communicates with the system controller using the built in Galaxy Protocol serial interface.
- Dual Voltage Compatible - unique connector pin designation allows the 48 Volt rectifiers to be used in a “Universal” power shelf, alongside DC-DC converters supporting loads at 24 Volts dc.
- Plug and Play – installation of the rectifier in a shelf connected to a compatible system controller initializes all set up parameters automatically. No adjustments are needed.
- Proportional Load Share – when paired with a NE050, both rectifiers share equal amount of load in relation to each unit's capacity.
- Meets most 3 phase needs. Works with 208V 3 Phase in a phase to phase configuration. Works from 480V 3 Phase in a line to neutral configuration.

Feature and Advantages

- Compact – 1RU form factor provides high power density 34 Watts/Cubic inch.
- Efficient – Peak efficiency of 95.6% occurs at 50% load matching sweet spots with customer use patterns.
- Flexibly provides 75 Amps of 48 Volt power from both conventional and sustainable sources of energy.
- Starts and runs at any AC voltage from 95 to 305 V_{AC}.
- Operates over a broad temperature range (-40°C through +75°C).
- Fail safe performance – hot insertion capabilities allow for rectifier replacement without system shutdown; soft start and inrush current protection prevent nuisance tripping of upstream breakers.
- Extended service life – parallel operation with automatic load sharing ensures that units are not unduly stressed.

NE075AC48ATEZ Technical Specification

Electrical Specifications





INPUT VOLTAGE & OUTPUT POWER	
Response to AC Input Voltage	Operates according to figure, turning on at all V_{IN} above $90V_{AC}$. Output power $1200W < 140V_{AC}$ $4087W > 175V_{AC}$ Output power follows linear path between defined points 305V max excursion voltage
AC Input Current	15A max @ $120V_{AC}$ 22-16A @ $200-277V_{AC}$
Power Factor	0.98 @ loads over 50%
THD	< 5% @ loads over 50%
Holdup	Typical, 15ms @ 56A load
Frequency	45-66Hz or DC

OUTPUT	
V_{OUT}	+42–58V _{DC} range Default = 54.5 V _{DC}
I_{OUT}	22A @ low input line 75A @ high input line 50A @ high line in older shelves
Regulation	± 0.05 w/controller
Ripple	100 mV _{RMS} , 250 mV _{P-P}
Efficiency	Approaching 95%
Soft Start	Starts up into fully discharged batteries

OmniOn Power is a trademark of OmniOn Power Inc. All other trademarks belong to their respective owners.

NE075AC48ATEZ Technical Specification (continued)

Characteristic Curves

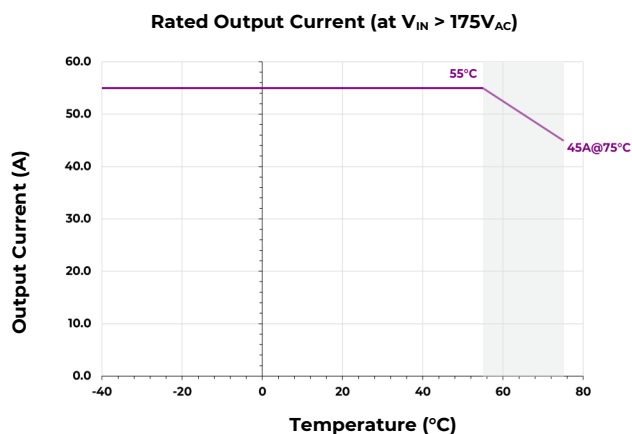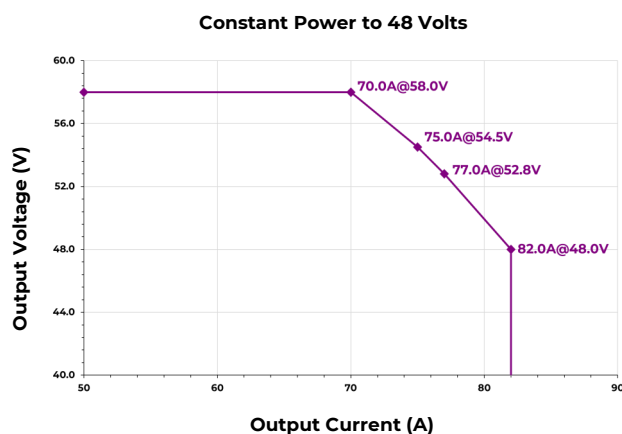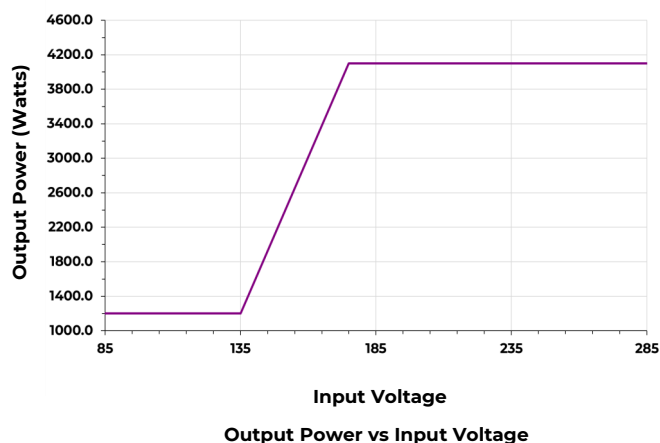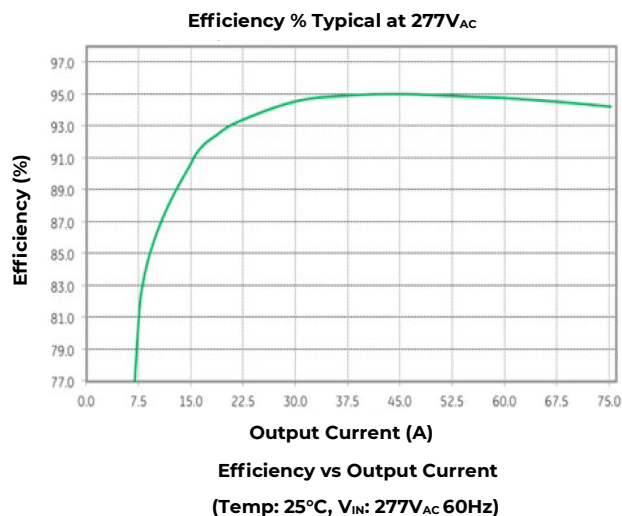

Environmental, Compliance & Physical

Operating Ambient Temperature Range	-40°C to +75°C (Output derates at 2%/°C beginning at 55°C)
Cooling Method	Front to back airflow with onboard temperature controlled fans
Operating Relative Humidity	0 - 95% (non-condensing) for use in a controlled environment
Electromagnetic Compatibility	FCC Part 15, EN 55022 (CISPR22), EN 55024, Level A, GR-1089
Lightning Surge	EN/IEC 61000-4-5 Level 4 (Error free), ANSI C62.41 Category B 100 kHz ring and 1.2/50µs combination waves (6kV damage free)
Agency Certifications* Planned	UL1950, EN60950, CSA*234/950, NEBS GR-1089, GR-63-CORE, RoHS 6/6
Heat Release	191 Watts, or 652 BTU/hr at full load of 4087 Watts
Mean Time Between Failure (MTBF)	300k Hours @ 25°C per Telcordia SR-332, Method 1, Case 3
Height x Width x Depth, Weight, Packaged Weight	1.63x5.23x13.85in (42x133x352mm), 5.90 lbs (2.7 kg), 6.95 lbs (3.2kg)

NE075AC48ATEZ Technical Specification (continued)


Power Unit and Power Unit Shelf Connectors

Power Unit PWB

A4	A3	A2	A1	-48V	-48V	RTN	RTN	RTN	RTN	+24V	+24V	+24V	PE/GND (ACEG)	L2/N	L1
B4	B3	B2	B1												
C4	C3	C2	C1			(-48/+24V)	(-48/+24V)	(-48/+24V)	(-48/+24V)						
D4	D3	D2	D1												
				P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
4x Pins	4x Pins	4x Pins	4x Pins	Blade	Blade	Blade MFBL (long)	Blade MFBL (long)	Blade MFBL (long)	Blade MFBL (long)	Blade	Blade	Blade	Blade MFBL (long)	Blade	Blade

Outline Drawing

Shown looking into the rear of the power unit

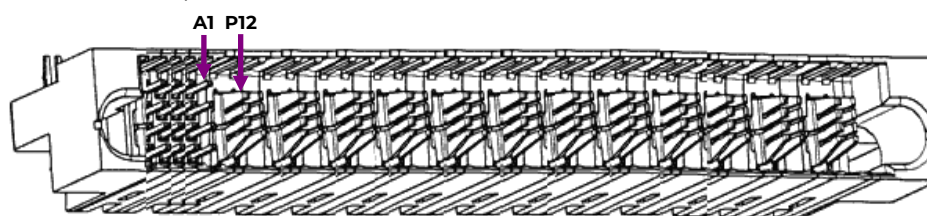


Power Unit Connector - AMP Multi-Beam XL (FCI # 51939-234LF or Tyco # 1900948-1)

Signals and Signal Pins

Pin	Length	Signal	Description
A1	Long	RS-485-	Non-Inverting RS-485 signal line (RS-485 A)
B1	Long	RS-485+	Inverting RS-485 signal line (RS-485 B)
C1	Long	Factory Programming	Reserved for Factory Programming – Open Circuit in the system shelf.
D1	Long	Return	- Signal Return for PSIDn, SIDn, & Interlock - Power Units Connect Return to NE Common Return internally. - Power Units diode isolate the Return signals from each Power Slot.
A2	Long	PSID0	Power Slot Address 0
B2	Long	PSID1	Power Slot Address 1
C2	Long	PSID2	Power Slot Address 2
D2	Long	SID3	Shelf Address 3
A3	Long	SID4	Shelf Address 4
B3	Long	SID5	Shelf Address 5
C3	Long	SID6	Shelf Address 6
D3	Long	SID7	Shelf Address 7
A4	Short	Interlock	- Disables power conversion within a Power Unit when not connected to the Return signal. - Power Unit Shelves connect Interlock directly to the Return signal at each Power Slot.
B4	Long	Factory Programming	Reserved for Factory Programming – Open Circuit in the system shelf.
C4	Long		
D4	Long		

NE075AC48ATEZ Mechanical Specifications

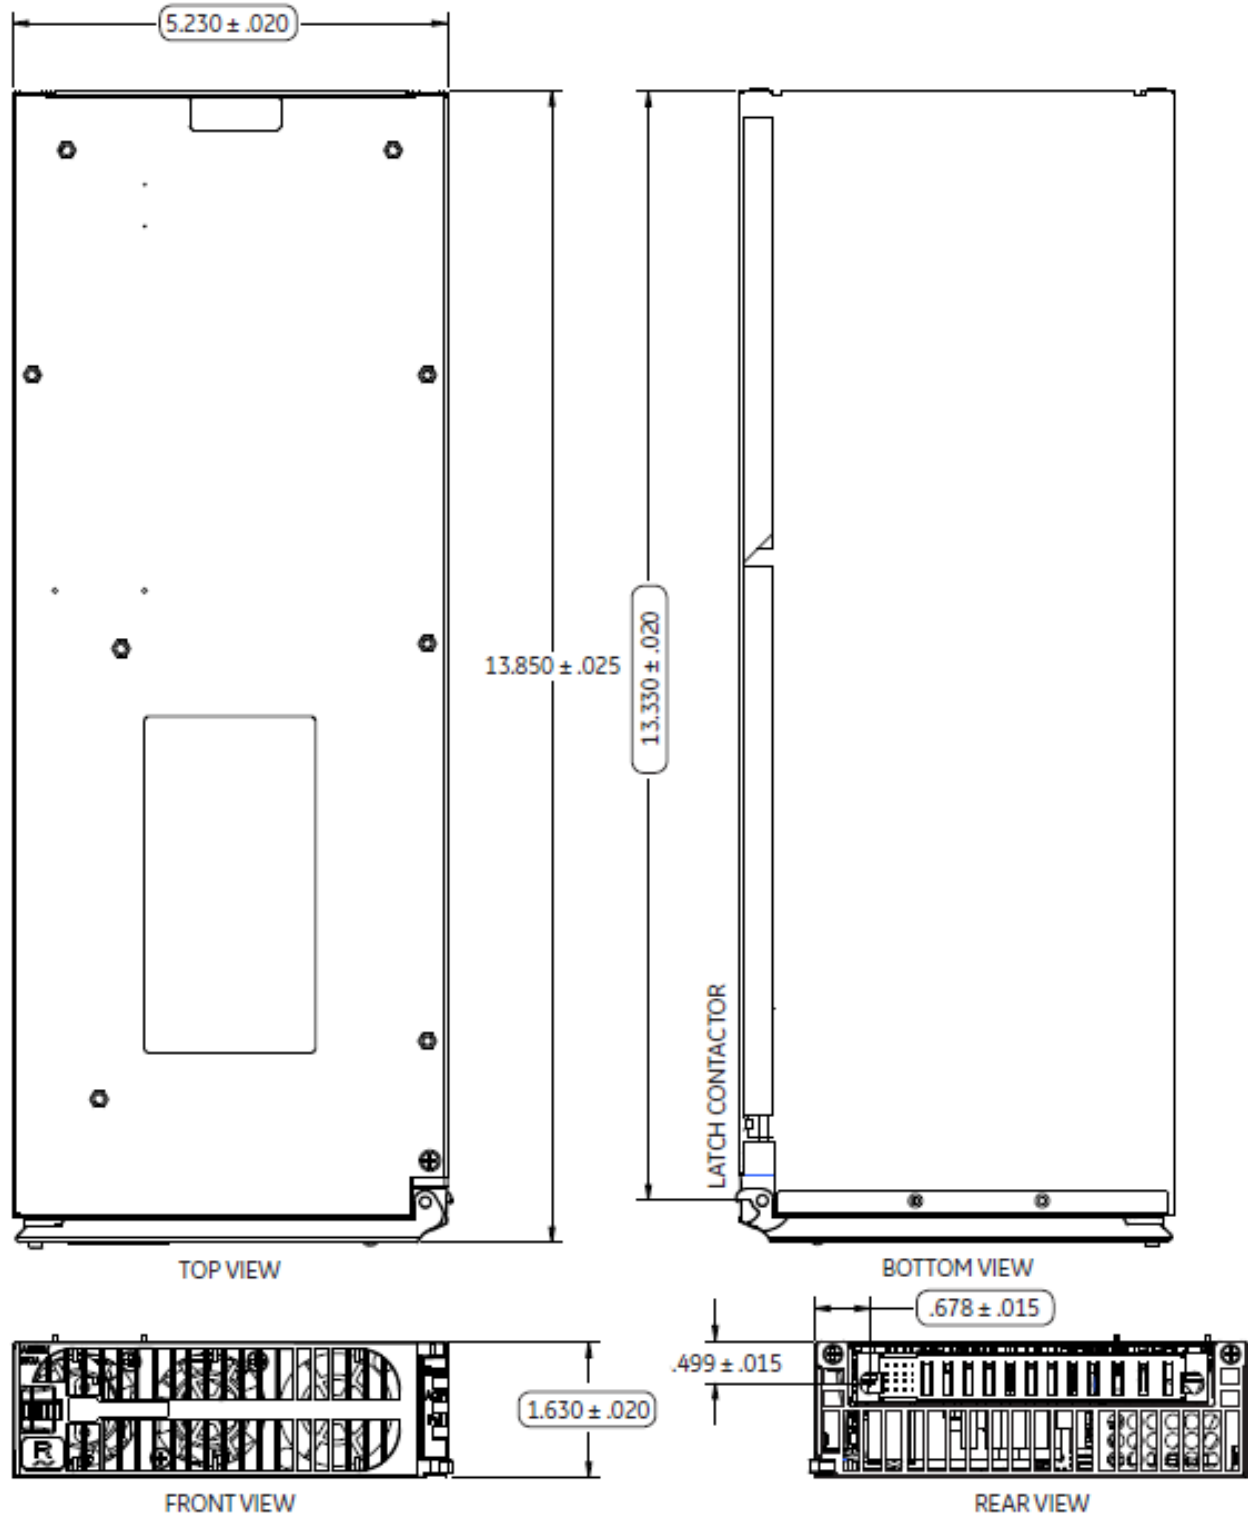

Change History (excludes grammar & clarifications)

Revision	Date	Description of the change
1.2	07-12-2021	Updated as per template
1.3	10-26-2023	Updated as per OmniOn Power™ template
1.4	01-04-2024	Updated to change FS to DS
1.5	02-28-2024	Updated Heat Release on Pg 3
1.6	05-22-2024	Updated content of Electrical Specifications
1.7	06-26-2024	Corrected company name
1.8	05-16-2025	Miscellaneous changes

OmniOn Power Inc.

601 Shiloh Rd.
Plano, TX USA

omnionpower.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power™ does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power™. This document does not convey license to any patent or any intellectual property right. Copyright© 2025 OmniOn Power Inc. All rights reserved.