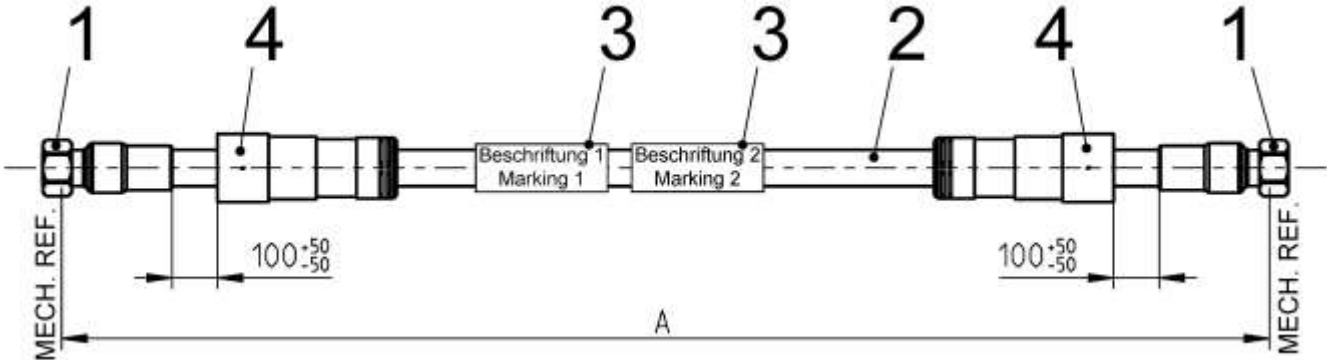


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet		Rosenberger
1/2" JUMPER	4.3-10 MALE / 4.3-10 MALE	SLJ12RPW-64M64M-X-00
		
Function Description		
This part is a coaxial cable assembly for telecommunication equipment. It consists of 1/2" flexible coaxial cable with PE jacket, two 4.3-10 male connectors and two Rosenberger Jumper Boots for additional protection of the connectors. The assembly is waterproof in mated condition and UV protected.		
Available Variants		
The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet and inch lengths are available on request.		
Assembly Parts		
Connectors	4.3-10 male (screw-type) connectors plated with white bronze	
Cable	S-Link 1/2"R, PE jacket	
Marking 1	Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.	
Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable	
Bend Protection	Molding material TPE compound or anti-kink sleeve	
Protection Boots	Self-lubricating silicone	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 1 / 2

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet				Rosenberger																																																																																																																																																																																																																																			
1/2" JUMPER		4.3-10 MALE / 4.3-10 MALE		SLJ12RPW-64M64M-X-00																																																																																																																																																																																																																																			
Electrical Data <table><tr><td>Impedance</td><td colspan="7">50 Ω</td></tr><tr><td>Frequency</td><td colspan="7">DC to 3.8 GHz</td></tr><tr><td>Return loss</td><td></td><td>L ≤ 10 m</td><td>L > 10 m</td><td colspan="4">L > 20 m</td></tr><tr><td>380 – 470 MHz</td><td></td><td>≥ 32 dB</td><td>≥ 30 dB</td><td colspan="4">≥ 28 dB</td></tr><tr><td>600 – 960 MHz</td><td></td><td>≥ 32 dB</td><td>≥ 30 dB</td><td colspan="4">≥ 28 dB</td></tr><tr><td>1.4 – 2.7 GHz</td><td></td><td>≥ 28 dB</td><td>≥ 26 dB</td><td colspan="4">≥ 24 dB</td></tr><tr><td>3.4 – 3.8 GHz</td><td></td><td>≥ 23 dB</td><td>≥ 21 dB</td><td colspan="4">≥ 19 dB</td></tr><tr><td>Insertion loss typ.</td><td></td><td colspan="6"></td></tr><tr><td>DC – 1 GHz</td><td></td><td colspan="6">≤ 0.08 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td>1 – 2.2 GHz</td><td></td><td colspan="6">≤ 0.13 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td>2.2 – 2.7 GHz</td><td></td><td colspan="6">≤ 0.15 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td>2.7 – 3.8 GHz</td><td></td><td colspan="6">≤ 0.16 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td>Intermodulation (3rd order @ 2 x 20 W)</td><td></td><td>typ.</td><td>max.</td><td colspan="4"></td></tr><tr><td></td><td></td><td>≤ -120 dBm</td><td>≤ -117 dBm</td><td colspan="4"></td></tr><tr><td>Relative Velocity of Propagation</td><td></td><td colspan="6">88 %</td></tr><tr><td>DC breakdown voltage</td><td></td><td colspan="6">2500 V</td></tr></table> Mechanical Data <table><tr><td>Coupling torque (recommended)</td><td colspan="7">5 to 8 Nm</td></tr><tr><td>Spanner flat on coupling nut</td><td colspan="7">22 mm</td></tr><tr><td>Cable diameter, jacket</td><td colspan="7">16 mm typ.</td></tr><tr><td>Tensile strength</td><td colspan="7">1100 N</td></tr><tr><td>Recommended hanger spacing</td><td colspan="7">0.8 m</td></tr><tr><td>Minimum bend radius single</td><td colspan="7">70 mm*</td></tr><tr><td>Minimum bend radius repeated</td><td colspan="7">125 mm*</td></tr><tr><td colspan="8">*Bending starts behind connector incl. the kink protection</td></tr></table> Environmental Data <table><tr><td>Operation temperature range</td><td colspan="7">-40 °C to +85 °C</td></tr><tr><td>Installation temperature range</td><td colspan="7">-25 °C to +60 °C</td></tr><tr><td>Degree of protection</td><td colspan="7">IEC 60529, IP68 1 bar for 1 h (mated)</td></tr><tr><td>RoHS</td><td colspan="7">compliant</td></tr></table>								Impedance	50 Ω							Frequency	DC to 3.8 GHz							Return loss		L ≤ 10 m	L > 10 m	L > 20 m				380 – 470 MHz		≥ 32 dB	≥ 30 dB	≥ 28 dB				600 – 960 MHz		≥ 32 dB	≥ 30 dB	≥ 28 dB				1.4 – 2.7 GHz		≥ 28 dB	≥ 26 dB	≥ 24 dB				3.4 – 3.8 GHz		≥ 23 dB	≥ 21 dB	≥ 19 dB				Insertion loss typ.								DC – 1 GHz		≤ 0.08 dB/m (cable) + 0.01 dB * √f (GHz)						1 – 2.2 GHz		≤ 0.13 dB/m (cable) + 0.01 dB * √f (GHz)						2.2 – 2.7 GHz		≤ 0.15 dB/m (cable) + 0.01 dB * √f (GHz)						2.7 – 3.8 GHz		≤ 0.16 dB/m (cable) + 0.01 dB * √f (GHz)						Intermodulation (3rd order @ 2 x 20 W)		typ.	max.							≤ -120 dBm	≤ -117 dBm					Relative Velocity of Propagation		88 %						DC breakdown voltage		2500 V						Coupling torque (recommended)	5 to 8 Nm							Spanner flat on coupling nut	22 mm							Cable diameter, jacket	16 mm typ.							Tensile strength	1100 N							Recommended hanger spacing	0.8 m							Minimum bend radius single	70 mm*							Minimum bend radius repeated	125 mm*							*Bending starts behind connector incl. the kink protection								Operation temperature range	-40 °C to +85 °C							Installation temperature range	-25 °C to +60 °C							Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)							RoHS	compliant						
Impedance	50 Ω																																																																																																																																																																																																																																						
Frequency	DC to 3.8 GHz																																																																																																																																																																																																																																						
Return loss		L ≤ 10 m	L > 10 m	L > 20 m																																																																																																																																																																																																																																			
380 – 470 MHz		≥ 32 dB	≥ 30 dB	≥ 28 dB																																																																																																																																																																																																																																			
600 – 960 MHz		≥ 32 dB	≥ 30 dB	≥ 28 dB																																																																																																																																																																																																																																			
1.4 – 2.7 GHz		≥ 28 dB	≥ 26 dB	≥ 24 dB																																																																																																																																																																																																																																			
3.4 – 3.8 GHz		≥ 23 dB	≥ 21 dB	≥ 19 dB																																																																																																																																																																																																																																			
Insertion loss typ.																																																																																																																																																																																																																																							
DC – 1 GHz		≤ 0.08 dB/m (cable) + 0.01 dB * √f (GHz)																																																																																																																																																																																																																																					
1 – 2.2 GHz		≤ 0.13 dB/m (cable) + 0.01 dB * √f (GHz)																																																																																																																																																																																																																																					
2.2 – 2.7 GHz		≤ 0.15 dB/m (cable) + 0.01 dB * √f (GHz)																																																																																																																																																																																																																																					
2.7 – 3.8 GHz		≤ 0.16 dB/m (cable) + 0.01 dB * √f (GHz)																																																																																																																																																																																																																																					
Intermodulation (3rd order @ 2 x 20 W)		typ.	max.																																																																																																																																																																																																																																				
		≤ -120 dBm	≤ -117 dBm																																																																																																																																																																																																																																				
Relative Velocity of Propagation		88 %																																																																																																																																																																																																																																					
DC breakdown voltage		2500 V																																																																																																																																																																																																																																					
Coupling torque (recommended)	5 to 8 Nm																																																																																																																																																																																																																																						
Spanner flat on coupling nut	22 mm																																																																																																																																																																																																																																						
Cable diameter, jacket	16 mm typ.																																																																																																																																																																																																																																						
Tensile strength	1100 N																																																																																																																																																																																																																																						
Recommended hanger spacing	0.8 m																																																																																																																																																																																																																																						
Minimum bend radius single	70 mm*																																																																																																																																																																																																																																						
Minimum bend radius repeated	125 mm*																																																																																																																																																																																																																																						
*Bending starts behind connector incl. the kink protection																																																																																																																																																																																																																																							
Operation temperature range	-40 °C to +85 °C																																																																																																																																																																																																																																						
Installation temperature range	-25 °C to +60 °C																																																																																																																																																																																																																																						
Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)																																																																																																																																																																																																																																						
RoHS	compliant																																																																																																																																																																																																																																						
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																																																																																																																																																																																																																																							
<table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td></tr><tr><td>M. Wimmer</td><td>18.08.2015</td><td>F. Fraunhofer</td><td>16.01.2020</td></tr></table>				Draft	Date	Approved	Date	M. Wimmer	18.08.2015	F. Fraunhofer	16.01.2020	<table><tr><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>d00</td><td>19-2445</td><td>B. Wollitzer</td><td>16.01.2020</td></tr></table>				Rev.	Engineering change number	Name	Date	d00	19-2445	B. Wollitzer	16.01.2020																																																																																																																																																																																																																
Draft	Date	Approved	Date																																																																																																																																																																																																																																				
M. Wimmer	18.08.2015	F. Fraunhofer	16.01.2020																																																																																																																																																																																																																																				
Rev.	Engineering change number	Name	Date																																																																																																																																																																																																																																				
d00	19-2445	B. Wollitzer	16.01.2020																																																																																																																																																																																																																																				
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 2 / 2																																																																																																																																																																																																																																	