

DROPLINE HARDWARE

Drop Wire Clamp	1
Fiber Drop Wire Clamp	1
Messenger Drop Clamp	1
Drop Pole Clamp	2
Span Clamp	2
Drop Wire Clip	3
Drop Wire Hook	3
E Drop Wire Clamp	3
Dual Cable Clamp	3
Corner Wall Bracket	3
Service Mast Strap	4
House Hook	4
U Cable Clip	4
Cable Clip	5
Baseboard Clip	5
S Clip	5
Cable Clamp	6
Cable Strap	6
C Wire Loop	7
Drive Pin	7
Drive Ring	7
3/4" Ground Bracket	8
Aluminum Cable Tie	8
ID Tag	8
Plastic Cable Clamp	8
Plastic Anchor	8
Drywall Anchor	9
Plastic Anchor Kit	9
Angle Screw	9
Two Post Terminal	9

BONDING & GROUNDING PRODUCTS

Ground Rod Clamp	10
Grounding Connector	10
Bonding Ribbon Connector	11
Distribution Connector	12
Structure I-Beam Ground Clamp	13
KUL Bonding Clamp	14
Water Pipe Ground Clamp	14
Split Bolt	14
Bonding Screw	14
Ground Block	15
F81 Splice Connector	15
Zinc Ground Block	15
ID Ground Tag	15
Ground Lug	16
Tap Clamp	16
B Strand Ground Clamp	16
Universal Ground Strap Clamp	17
B Ground Wire Clamp	17
Bonding Ribbon Clamp	17
Meter Box Clamp	18
Ground Wire	18
Copper Bond Bar	19
Bonding Ribbon	19
Bond Braid	19

Multiple Ground Bar	19
Tap Grounding Clamp	20
Demarcation Plate	20
Wire Terminal	20
Bonding Harness	20

AERIAL/POLELINE HARDWARE

Drive Hook	23
Suspension Clamp	23
Guy Hook	23
Thimble Eye Nut	24
Lashing Support Strap and Spacer	24
Lashing Wire	25
D Cable Lashing Wire Clamp	25
Lashing Wire Clamp	25
Pole Step	25
Cable Guard Strap	27
Aluminum Damper	27
Tap Bracket	27
Reinforcing Strap	28
Guy Attachment	28
Pole Plate	28
Extension Bracket	28
Cable Rack Support	28
Drive Screw	29
Lag Screw	29
Lag Shield	30
Masonry Screw	30
Hex Head Cap Screw	30
Drywall Screw	30
Crossover Clamp	30
Double Arming Bolt	31
Carriage Bolt	31
Machine Bolt	32
Square Nut	33
Hex Locknut	33
Serrated Flange Locknut	34
Lock Washer	34
Nail	34
Washer	35
Staple	35

DATACOM PRODUCTS

Distribution Ring	37
Wall Plate	37
Bridle Ring	38
Baseboard Clip	38
Drive Ring	38

TOOLS

Terminal Wrench	39
Handi-Reel	39
Throwing Weight	39
Auger Bit	40
Bellhanger's Drill Bit	40

APPLICATIONS

CROSS REFERENCE BY SENIOR INDUSTRIES PART NUMBER

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
SI-100	35	SI-0040S	25	SI-0958 Series	17	SI-1518	33	SI-3104	34	SI-6933 Series	6
SI-101	35	SI-0041	26	SI-0959	1	SI-1520	33	SI-3105	34	SI-7005	9
SI-102	35	SI-0041S	26	SI-0959P	1	SI-1522	33	SI-3106	34	SI-7006	9
SI-103	35	SI-0042	26	SI-0960	17	SI-1524	33	SI-3107	34	SI-7034	28
SI-104	35	SI-0043	32	SI-0961	1	SI-1526	33	SI-3108	34	SI-7034MB	28
SI-110	35	SI-0044	32	SI-0965	1	SI-1550	39	SI-3109	34	SI-7171	19
SI-121	35	SI-0045	32	SI-0966	1	SI-1630	16	SI-3113	34	SI-7177-1	19
SI-122	35	SI-0046	32	SI-0968	1	SI-1638	19	SI-3720	19	SI-7195	39
SI-123	35	SI-0047	26	SI-0969	1	SI-1720	17	SI-3910	16	SI-7501	9
SI-141	36	SI-0048	26	SI-0969INS	1	SI-1740	23	SI-4405	24	SI-7511 Series	24
SI-142	36	SI-0048S	26	SI-0969INS-1	1	SI-1750	23	SI-4406	24	SI-7512 Series	24
SI-143	36	SI-0049	26	SI-0972	1	SI-1755	23	SI-4425	23	SI-9000	35
SI-150	36	SI-0050	31	SI-0975	2	SI-1756	30	SI-4426	23	SI-9004	35
SI-151	36	SI-0051	31	SI-0984	3	SI-2002	14	SI-4430	28	SI-9010	35
SI-152	36	SI-0052	31	SI-0985	3	SI-2004	14	SI-4609	7	SI-9023	35
SI-153	36	SI-0053	31	SI-0986	3	SI-2006	14	SI-4610	7	SI-9024	35
SI-170	36	SI-0054	31	SI-0987	3	SI-2008	14	SI-4611	7	SI-9061	35
SI-171	36	SI-0055	31	SI-0987-6	3	SI-2010	19	SI-4612	7	SI-9063	35
SI-172	36	SI-0058	29	SI-0987CW	3	SI-2020	20	SI-4753	37	SI-9064	35
SI-173	36	SI-0059	29	SI-0987D	3	SI-2030	20	SI-4753-M	37	SI-9065	35
SI-180	36	SI-0060	38	SI-0988 Series	4	SI-2030-81	20	SI-4754	37	SI-9102	35
SI-181	36	SI-0061	38	SI-0989 Series	5	SI-2040	20	SI-4754-M	37	SI-9103	35
SI-182	36	SI-0062	38	SI-0990	5	SI-2040-81	20	SI-4755	37	SI-9104	35
SI-200	36	SI-0063	38	SI-0990-2	5	SI-2140	12	SI-4755-M	37	SI-9105	35
SI-201	36	SI-0064	3	SI-0990-3	5	SI-2141	12	SI-5357	33	SI-9106	35
SI-202	36	SI-0064R	3	SI-0991	5/38	SI-2142	10	SI-5358	34	SI-9130	39
SI-203	36	SI-0075	27	SI-0992	5/38	SI-2142-3G	10	SI-5362	33	SI-9541	18
SI-204	36	SI-0076	27	SI-0993	5/38	SI-2143	12	SI-5363	33	SI-9542	18
SI-205	36	SI-0077	27	SI-0994	5/38	SI-2145	13	SI-5364	33	SI-9543	18
SI-206	36	SI-0078	27	SI-1130	3	SI-2145A	13	SI-5365	33	SI-9544	18
SI-210	36	SI-0079	27	SI-1203	32	SI-2154	18	SI-5366	33	SI-9545	18
SI-211	36	SI-0081	10	SI-1204	32	SI-2159	11	SI-5947	14	SI-9546	18
SI-212	36	SI-0082	10	SI-1206	32	SI-2160	13	SI-5948	14	SI-9603	25
SI-213	36	SI-0082JK	10	SI-1208	32	SI-2160S	13	SI-5948G	14	SI-9607	25
SI-214	36	SI-0088A	28	SI-1209	32	SI-2161	12	SI-5948Z	14	SI-9609	25
SI-215	36	SI-0088B	28	SI-1210	32	SI-2162	12	SI-6035	29	SI-9610	25
SI-216	36	SI-00E6	8	SI-1211	32	SI-2163	18	SI-6037	29	SI-AB Series	40
SI-900	34	SI-00E7	9	SI-1212	32	SI-2165	18	SI-6038	29	SI-BD Series	40
SI-901	34	SI-00E8	8	SI-1214	32	SI-2166LG	18	SI-6039	29	SI-BH-1410-RRX20	
SI-903	34	SI-0513	2	SI-1216	32	SI-2166LS	18	SI-6039A	29	SI-BH-1420-RRX20	
SI-911	34	SI-0513MB	2	SI-1304	32	SI-2166SG	18	SI-6040	29	SI-BHA Series	21
SI-912	34	SI-0514	2	SI-1305	32	SI-2166SS	18	SI-6040A	29	SI-BHB Series	21
SI-913	34	SI-0515	2	SI-1306	32	SI-2167	18	SI-6041	29	SI-BHC Series	21
SI-921	34	SI-0515MB	2	SI-1308	32	SI-2167C	18	SI-6041A	29	SI-GB Series	15
SI-0010	4	SI-0515GC	2	SI-1315	32	SI-2167GC	18	SI-6042	30	SI-GBZ-11	15
SI-0010L	4	SI-0555	31	SI-1316	32	SI-2167SLM	18	SI-6043	30	SI-GBZ-22	15
SI-0010CW	4	SI-0556	31	SI-1317	32	SI-2167SLM-WL	18	SI-6044	30	SI-GBZ-23	15
SI-0010WXL	4	SI-0557	31	SI-1318	32	SI-2167SLM-3G	18	SI-6101	7	SI-GBZ-44	15
SI-0011	4	SI-0558	31	SI-1319	32	SI-2168CA	18	SI-6102	7	SI-GL Series	16
SI-0012	4	SI-0560	31	SI-1320	32	SI-2169	11	SI-6103	7	SI-LS-14	30
SI-0012-1	4	SI-0565	31	SI-1322	32	SI-2169-M	11	SI-6104	7	SI-LS-516	30
SI-0012-2	4	SI-0566	31	SI-1324	32	SI-2169SS	11	SI-6105	7	SI-SG-81	15
SI-0012-ANG	4	SI-0910	31	SI-1326	32	SI-2170	11	SI-6105A	7	SI-SGL-81	15
SI-0012-COR	4	SI-0912	31	SI-1410	33	SI-2172	11	SI-6106	7	SI-SK-8	9
SI-0013	8	SI-0914	31	SI-1412	33	SI-2173	12	SI-6107	7	SI-SK-10	9
SI-0014	4	SI-0916	31	SI-1414	33	SI-2174	14	SI-6108	7	SI-SP-81	15
SI-0015	4	SI-0918	31	SI-1416	33	SI-2174TC	16	SI-6203	29	SI-TAG-100-G	15
SI-0015-1	4	SI-0920	31	SI-1418	33	SI-2175	25	SI-6204	29	SI-TAG-101	8
SI-0015SS	4	SI-0922	31	SI-1420	33	SI-2176	25	SI-6226	29	SI-TAG-102	8
SI-0024	2	SI-0924	31	SI-1422	33	SI-2176T	25	SI-6228	29	SI-TAG-103-G	15
SI-0029	29	SI-0926	31	SI-1424	33	SI-2177	13	SI-6229	29	SI-TAG-104-G	15
SI-0030	29	SI-0928	31	SI-1426	33	SI-2179	12	SI-6237	29	SI-TAP Series	27
SI-0031	29	SI-0930	31	SI-1428	33	SI-2180	11	SI-6238	29	SI-UBN-12R	14
SI-0032	29	SI-0936	8	SI-1430	33	SI-2181	13	SI-6241	29	SI-UBN-58R	14
SI-0033	29	SI-0937	8	SI-1432	33	SI-2181A	13	SI-6344 Series	6	SI-WP-100	37
SI-0034	29	SI-0938	8	SI-1434	33	SI-2290	16	SI-6651	38	SI-WT-6T-250	20
SI-0036	29	SI-0939-7	8	SI-1436	33	SI-2302	27	SI-6653	38	STD720336	28
SI-0037	26	SI-0939-10	8	SI-1438	33	SI-2357	28	SI-6666	38		
SI-0038	10	SI-0939-12	8	SI-1500	39	SI-3000	23	SI-6667	38		
SI-0038C	10	SI-0952	2	SI-1508	33	SI-3001	23	SI-6669	38		
SI-0038CN	10	SI-0954 Series	17	SI-1510	33	SI-3100	34	SI-6861	7/38		
SI-0038N	10	SI-0956	1	SI-1512	33	SI-3101	34	SI-6862	7/38		
SI-0039	29	SI-0956P	1	SI-1514	33	SI-3102	34	SI-6863	7/38		
SI-0040	25	SI-0957	1	SI-1516	33	SI-3103	34	SI-6864	7/38		

BUREAU VERITAS
Certification



Certification

Awarded To

SENIOR INDUSTRIES INC

610 POND DRIVE, WOOD DALE, ILLINOIS, U.S.A.

Bureau Veritas Certification North America, Inc. certifies that the management system of the above organization has been audited and found to be in accordance with the requirements of the management system standards and scope of supply detailed below

STANDARDS

ISO 9001:2008

SCOPE OF SUPPLY

DESIGNER, MANUFACTURER AND SUPPLIER OF STANDARD AND CUSTOM ELECTROMECHANICAL COMPONENTS TO THE TELECOMMUNICATIONS AND OTHER INDUSTRIES WITH EMPHASIS ON SWITCHES, JACKS, CONNECTORS, MAGNETIC PRODUCTS (TRANSFORMERS, CHOKES, COILS), PLUGS, CABLE ASSEMBLIES; AND OUTSIDE PLANT HARDWARE PRODUCTS TO THE TELEPHONE, CATV AND UTILITY INDUSTRIES.

Original Approval Date: 15 September 2005

Subject to the continued satisfactory operation of the Organization's Management System, this certificate will remain valid until: 22 September 2011

Further clarifications regarding the scope of this certificate and the applicability of the management system requirements may be obtained by consulting the organization.

Certificate No: US 08000527

Issue Date : 23 September 2008

Revision Date : 12 November 2010

For Bureau Veritas Certification North America, Inc.
3663 North Sam Houston Pkwy, Houston, USA
www.certification.us.bureauveritas.com



Senior Industries Drop Line Hardware is engineered and manufactured to meet today's telephone and cable systems needs of offering more bandwidth intensive, two-way applications. Senior's Digital Drop System (DDS) Hardware is an integrated sequence of products from the tap to the subscriber's home, that is backed with installation training and support to assure the most cost effective and trouble free drop installation. Mechanical plating is per ASTM B695. Hot-dip galvanizing is per ASTM A153.

For technical support, installation information and special requirements please contact our Inside Sales Team at: 1-800-350-1650, or via e-mail at: sales@seniorindustries.com

© 2010 Senior Industries, Inc. All rights reserved. Specifications subject to change without notice.

Some products are non-standard and may be subject to longer lead time delivery and minimum order quantity requirements.

DROP WIRE CLAMP

- Used to strain relieve telephone drop wire
- Designed to be used to support 1 through 6 pair drop wires
- Removable
- Stainless steel or aluminum construction, metal or plastic shim
- 3 piece or 2 piece (captive shim) construction



Patented captive shim design prevents incorrect installation



Part Number	Material	Shim	Shim Material	Number of Pairs/Clamp	Carton Qty	Carton Size	Carton Weight
SI-0956	Stainless Steel	Removable	Stainless Steel	2	250	9½" x 8¼" x 7½"	23 Lbs.
SI-0956P	Stainless Steel	Removable	Plastic	2	250	9½" x 8¼" x 7½"	22 Lbs.
SI-0957	Stainless Steel	Removable	Plastic	1	250	9½" x 8¼" x 7½"	22 Lbs.
SI-0959	Aluminum	Removable	Aluminum	2	250	10½" x 8½" x 6½"	17 Lbs.
SI-0959P	Aluminum	Removable	Plastic	2	250	18¾" x 8½" x 8½"	22 Lbs.
SI-0961	Stainless Steel	Captive	Stainless Steel	2	250	19" x 9" x 5"	24 Lbs.
SI-0965	Stainless Steel	Captive	Stainless Steel	3	200	19" x 9" x 5"	22 Lbs.
SI-0966	Stainless Steel	Removable	Stainless Steel	6	200	13" x 11" x 8"	34 Lbs.
SI-0968	Stainless Steel	Captive	Stainless Steel	6	200	19" x 9" x 5"	34 Lbs.

FIBER DROP WIRE CLAMP

- Used to strain relieve fiber drop cable
- Easily removable
- Flat cable configuration
- Stainless steel construction
- Patented

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0972	100	13¾" x 5" x 5½"	14 Lbs.



MESSENGER DROP CLAMP

- Used to support messenger drop cable between the pole, mid-span and house
- Accepts RG 6, RG 6Q, RG 11 and RG 59, with .061" or .072" diameter messenger wire
- Stainless steel wire, aluminum body
- 500lb. pull capacity
- Available with insulator adapter
- Patented

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0969	100	9" x 7" x 7"	5 Lbs.
SI-0969INS	100	9½" x 9½" x 7½"	7 Lbs.
SI-0969INS-1	2000	14" x 14" x 10"	28 Lbs.



SI-0969



SI-0969INS

SI-0969INS-1

DROP POLE CLAMP

- Used to suspend messengered drop cable at service pole while keeping the messenger strand wire intact for bonding purposes
- Retainer ring provides 1" diameter wrap to secure the messenger wire
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0975	100	14" x 5" x 6"	20 Lbs.



SPAN CLAMP

- Used for mid-span drop wire take-offs
- Will hold cable away from obstacles in the line of aerial construction

E Span Clamp

Bellcore Specification: 8391
PID Number: 400 324 489

- Designed for 1/4" to 5/8" steel strand
- Constructed of high quality steel, hot-dip galvanized


Part Number	Carton Qty	Carton Size	Carton Weight
SI-0024	50	9" x 6" x 5"	22 Lbs.



Q Span Clamp

- Designed for 1/4" to 5/8" steel strand
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0513	120	14" x 5" x 6"	22 Lbs.
SI-0513MB	80	13" x 6" x 6"	16 Lbs.

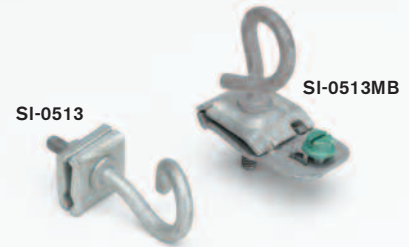

O Span Clamp

- Designed for 1/4" to 5/8" steel strand
- Bolt is made of high quality steel, mechanically plated
- Plates are constructed of 1/4" aluminum

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0514	100	9" x 6" x 5"	22 Lbs.



Multi-Span Clamp

- Designed for 1/4" messenger strand
- Provides fast, easy mid-span take-offs for service drops
- Multi-directional span clamp
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0515	100	14" x 5" x 6"	17 Lbs.
SI-0515MB	120	14" x 5" x 6"	22 Lbs.
SI-0515GC	100	14" x 5" x 6"	18 Lbs.



C Span Clamp

- Designed for 1/4" to 5/8" messenger strand
- Bolt/hook is made of high quality steel, mechanically plated
- Plates are constructed of 1/4" aluminum

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0952	100	10" x 9" x 7"	24 Lbs.



DROP WIRE CLIP

Belcore Specification: 7226

Part Number PID Number
SI-0986 400 122 560

- Used to loop and hold a drop wire to itself for snub attachments
- Constructed of aluminum
- Ordinary pliers are used to fasten the clip to the drop wire

Part Number	Clip Size	Carton Qty	Carton Size	Carton Weight
SI-0984	6 pr.	1000	18" x 14" x 14"	17 Lbs.
SI-0985	2-3 pr.	1000	12" x 6" x 6"	7.5 Lbs.
SI-0986	1-2 pr.	1000	18" x 16" x 14"	6 Lbs.



DROP WIRE HOOK

Belcore Specification: 6530

PID Number: 400 315 156

- Specially shaped hook for attaching drop wire clamps or drop wires to houses
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-1130	100	6½" x 5" x 4½"	7 Lbs.



E DROP WIRE CLAMP

Belcore Specification: 7590

PID Number: 400 121 547

- Used to secure drop wire to wood or masonry surfaces
- Constructed of high quality steel, mechanically plated

Part Number	Clip Size	Bag Qty	Carton Qty	Carton Size	Carton Weight
SI-0987	2 Pr.	50	3000	14" x 14" x 8"	28 Lbs.
SI-0987-6	6 Pr.	50	900	10" x 10" x 6½"	13 Lbs.



Wire Clip with Screw

- Insulated with PVC coating
- Used with #10 wood screw, zinc plated
- Clip constructed of high quality steel, mechanically plated

Part Number	Clip Size	Bag Qty	Carton Qty	Carton Size	Carton Weight
SI-0987CW	2 Pr.	50	1000	18" x 14" x 14"	21 Lbs.



DUAL CABLE CLAMP

- For use with 1/8" diameter cable or wire
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0987D	1000	8¼" x 8¼" x 5½"	5.5 Lbs.



CORNER WALL BRACKET

- Used to dead end messenger drop cable at the building
- Constructed of high quality steel, mechanically plated

Part Number	Oval Retainer	Carton Qty	Carton Size	Carton Weight
SI-0064	No	50	9" x 7" x 6"	16 Lbs.
SI-0064R	Yes	50	9" x 7" x 6"	16.5 Lbs.



SERVICE MAST STRAP

- Used to dead end drop cable at the house power service mast
- Constructed of high quality steel, mechanically plated for maximum corrosion protection

Part Number	Type	Length	Carton Qty	Carton Size	Carton Weight
SI-0015	Galvanized Steel	13½"	100	18" x 9" x 7"	24 Lbs.
SI-0015-1	Buckle only		100	7" x 5" x 5"	14 Lbs.
SI-0015SS	Stainless Steel	13½"	100	18" x 9" x 7"	21 Lbs.



HOUSE HOOK

- Used to secure drop cable or steel messenger wire at the pole or house
- Constructed of high quality steel, mechanically plated for maximum corrosion protection

Part Number	Hook Type	Plating Type	Carton Qty	Carton Size	Carton Weight
SI-0010	P Type, 3¼"	Mech.	100	5" x 5" x 3"	7.5 Lbs
SI-0010L	P Type, 4½"	Mech.	100	6" x 6" x 4"	6.4 Lbs.
SI-0010CW	Wrenchable P Hook, 4½"	Mech.	100	9" x 7" x 7"	6.4 Lbs.
SI-0010WXL	Wrenchable P Hook, 6½"	Mech.	100	7" x 7" x 3½"	9 Lbs.
SI-0011	J Type Hook, 4"	Mech.	500	13" x 9" x 5"	53 Lbs.
SI-0012	T House Hook, 3 Hole	Mech.	100	9" x 7" x 6"	10 Lbs.
SI-0012-1	T House Hook, 1 Hole	Mech.	100	9" x 7" x 6"	10 Lbs.
SI-0012-2	T House Hook, 2 Hole	Hot Dip	100	9" x 7" x 6"	10 Lbs.
SI-0012-ANG	T House Hook, Angled	Hot Dip	100	9" x 7" x 6"	15 Lbs.
SI-0012-COR	T House Hook, Corner	Hot Dip	100	9" x 7" x 6"	24 Lbs.
SI-0014	with Oval Retainer	Mech.	100	9" x 7" x 6"	13 Lbs.



U CABLE CLIP

- Used to secure drop cables to wood or masonry surfaces
- Constructed of soft aluminum for pliability

Part Number	Cable Size	Carton Qty	Carton Size	Carton Weight
SI-0988-6	RG 6	1000	6" x 6" x 6"	2 Lb.
SI-0988-6G	#6 AWG	1000	6" x 6" x 6"	1 Lb.
SI-0988-6Q	RG 6 Quad	1000	6" x 6" x 6"	1 Lb.
SI-0988-11	RG 11	1000	6" x 6" x 6"	2 Lbs.
SI-0988-12G	#12 AWG	1000	6" x 6" x 6"	1 Lb.
SI-0988-59	RG 59	1000	6" x 6" x 6"	2 Lbs.
SI-0988-C5	Category 5	1000	5" x 6" x 5"	2 Lbs.
SI-0988-D6	Dual RG6	1000	8" x 6" x 6"	2 Lbs.



CABLE CLIP

- Used to secure drop cable to wood or masonry surfaces
- Patent Pending
- Constructed of high quality steel, mechanically plated with pre-inserted self-tapping screw, drive pin, or hardened nail

Part Number	Cable Size	Carton Qty	Carton Size	Carton Weight
SI-0989-6	RG 6	1000	9" x 7" x 6"	14 Lbs.
SI-0989-6Q	RG 6 Quad	1000	9" x 7" x 6"	15 Lbs.
SI-0989-11	RG 11	1000	9" x 7" x 6"	16 Lbs.
SI-0989-59	RG 59	1000	9" x 7" x 6"	14 Lbs.
SI-0989D-6	RG 6	1000	9" x 7" x 6"	14 Lbs.
SI-0989D-6Q	RG 6 Quad	1000	9" x 7" x 6"	14 Lbs.
SI-0989D-11	RG 11	1000	9" x 7" x 6"	16 Lbs.
SI-0989D-59	RG 59	1000	9" x 7" x 6"	14 Lbs.
SI-0989N-6	RG 6	1000	9" x 7" x 6"	14 Lbs.
SI-0989N-6Q	RG 6 Quad	1000	9" x 7" x 6"	14 Lbs.
SI-0989N-11	RG 11	1000	9" x 7" x 6"	16 Lbs.
SI-0989N-59	RG 59	1000	9" x 7" x 6"	14 Lbs.

D suffix denotes Drive Pin version

N suffix denotes Hardened Nail version, 1" in length



SI-0989D-6



SI-0989-6

BASEBOARD CLIP

- Used to secure coaxial cable or twisted pair wire to baseboard
- Steel construction, enamel coated
- Patent pending
- Add suffix to part number to denote color: N = Neutral, W = White, B = Black

Part Number	Cable Size	Carton Qty	Carton Size	Carton Weight
SI-0991	RG 6	1000	6" x 4" x 4"	4 Lbs.
SI-0992	RG 6 Quad	1000	6" x 4" x 4"	4 Lbs.
SI-0993	Telephone	1000	6" x 4" x 4"	4 Lbs.
SI-0994	Category 5	1000	6" x 4" x 4"	4 Lbs.



S CLIP

- Prevents messenger wire from separating from the drop cable
- Constructed of soft aluminum

Part Number	Cable Size	Carton Qty	Carton Size	Carton Weight
SI-0990	RG 6	1000	6" x 6" x 6"	5 Lbs.
SI-0990-2	RG 11	1000	6" x 6" x 6"	5 Lbs.
SI-0990-3	Dual Cable	1000	13½" x 8¼" x 5½"	8 Lbs.

SI-0990




SI-0990-2

CABLE CLAMP

Bellcore Specification: 6933

Part Number	PID Number
SI-6933-1	402 855 183
SI-6933-3	400 120 895
SI-6933-4	400 120 903
SI-6933-6	400 120 911
SI-6933-8	400 120 937
SI-6933-10	400 120 952
SI-6933-13	400 120 978
SI-6933-17	400 120 986
SI-6933-21	400 120 994
SI-6933-30	400 121 018
SI-6933-35	400 121 026

- Used to support cable, conduit or pipe to buildings and other surfaces
- Constructed of high quality steel, mechanically plated

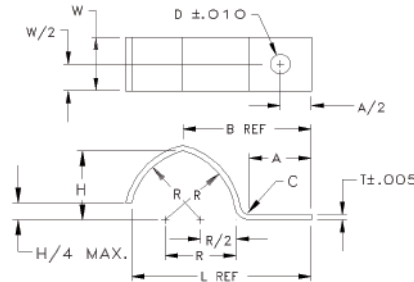


Part Number	Dimensions								Package Qty	Carton Qty	Carton Size	Carton Weight
	(A)	(B)	(C)	(D)	(H)	(L)	(R)	(W)				
SI-6933-1	.312	.444	.031	.203	.093	.514	.093	.312	10	20000	16" x 16" x 16"	30 Lbs.
SI-6933-3	.312	.528	.031	.203	.188	.669	.188	.312	10	10000	12" x 12" x 8"	25 Lbs.
SI-6933-4	.312	.605	.062	.203	.250	.792	.250	.500	50	3000	14" x 5" x 6"	16 Lbs.
SI-6933-6	.438	.802	.062	.265	.344	1.060	.344	.500	50	5000	12" x 12" x 8"	34 Lbs.
SI-6933-8	.438	.872	.062	.280	.438	1.200	.438	.750	50	3000	12" x 12" x 8"	37 Lbs.
SI-6933-10	.500	1.091	.125	.280	.563	1.513	.563	.750	25	2000	12" x 12" x 8"	40 Lbs.
SI-6933-13	.625	1.372	.125	.280	.750	1.934	.750	.750	20	1500	12" x 12" x 8"	40 Lbs.
SI-6933B-13	.813	1.344	.125	.280	.344	1.741	.344	.687	20	800	13½" x 10" x 5½"	22 Lbs.
SI-6933-17	.875	1.828	.125	.280	.938	2.578	1.000	.750	25	1000	12" x 12" x 8"	60 Lbs.
SI-6933-21	1.188	2.412	.125	.280	1.250	3.396	1.312	.750	10	500	12" x 12" x 8"	63 Lbs.
SI-6933-25	1.188	2.564	.125	.280	1.566	3.763	1.530	.750	10	500	14" x 14" x 8"	63 Lbs.
SI-6933-30	1.188	2.740	.125	.280	1.688	4.052	1.750	.750	10	500	12" x 12" x 8"	69 Lbs.
SI-6933-35	1.325	3.209	.125	.280	2.062	4.803	2.125	.750	10	300	12" x 12" x 8"	50 Lbs.

CABLE STRAP

Bellcore Specification: 6344

Part Number	PID Number
SI-6344-9	400 272 084
SI-6344-11	400 272 092
SI-6344-13	400 272 100
SI-6344-16	400 272 118
SI-6344-20	400 272 126
SI-6344-24	400 272 134
SI-6344-30	400 272 142
SI-6344-36	400 272 159
SI-6344-42	400 272 167
SI-6344-56	400 272 175
SI-6344-64	400 272 183

- Used to secure cable, pipe and conduit to various surfaces
- Constructed of high quality steel, mechanically plated



Part Number	Dimensions					Package Qty	Carton Qty	Carton Size	Carton Weight
	(A)	(B)	(C)	(F)	(R)				
SI-6344-9	1½/32"	5/16"	9/16"	5/8"	3/32"	25	2000	14" x 10" x 8"	40 Lbs.
SI-6344-11	9/16"	3/4"	1½/16"	5/8"	1/8"	25	1600	14" x 10" x 8"	32 Lbs.
SI-6344-13	1½/16"	3/4"	13/16"	3/4"	1/8"	25	1200	14" x 10" x 8"	34 Lbs.
SI-6344-16	7/8"	7/8"	1"	3/4"	3/16"	25	800	14" x 10" x 8"	42 Lbs.
SI-6344-20	1½/16"	1"	1¼"	3/4"	3/16"	25	600	14" x 10" x 8"	32 Lbs.
SI-6344-24	1½/16"	1"	1½"	3/4"	3/16"	25	500	14" x 10" x 8"	36 Lbs.
SI-6344-30	1½/16"	1½/16"	1½"	7/8"	¼"	25	500	14" x 10" x 8"	50 Lbs.
SI-6344-36	2"	1½/16"	2¼"	7/8"	¼"	25	400	14" x 10" x 8"	55 Lbs.
SI-6344-42	2½/16"	1½/16"	2½"	7/8"	¼"	25	400	14" x 10" x 8"	63 Lbs.
SI-6344-56	3"	1¼"	3½"	1"	3/8"	25	300	14" x 10" x 8"	67 Lbs.
SI-6344-64	3½"	1¼"	4"	1"	3/8"	25	300	14" x 10" x 8"	68 Lbs.

C WIRE LOOP

Bellcore Specification: 7887

- Constructed of high quality steel, mechanically plated
- Used with drive pins to secure drop wire to wood or masonry surfaces

Part Number	Size	PID Number	Carton Qty	Carton Weight
SI-4609	½"	400 491 650	288	3 Lbs.
SI-4610	⅝"	—	288	4 Lbs.
SI-4611	⅞"	400 491 635	288	11 Lbs.
SI-4612	1¼"	400 491 619	900	56 Lbs.



DRIVE PIN

Bellcore Specification: 7887

Part Number

PID Number

SI-6101 400 139 895

SI-6102 400 139 903

SI-6103 400 139 911

SI-6104 400 139 929

SI-6105 400 139 937

SI-6106 400 139 945

SI-6107 400 139 952

SI-6108 400 139 960

- Used to mount wire loops to masonry or wood in drop applications
- Constructed of hardened steel, zinc plated
- Supplied with one washer assembled



Part Number	Length	Bag Qty	Carton Qty	Carton Size	Carton Weight
SI-6101	½"	100	1000	2¼" x 1¼" x 3⅝"	3 Lbs.
SI-6102	¾"	100	1000	2¼" x 1¼" x 3⅝"	4 Lbs.
SI-6103	1"	100	1000	2½" x 1½" x 3½"	5 Lbs.
SI-6104	1¼"	100	1000	2½" x 1½" x 3½"	6 Lbs.
SI-6105	1½"	100	1000	2¾" x 1½" x 4"	8 Lbs.
SI-6105A	1¾"	100	1000	6¼" x 6¼" x 4"	13 Lbs.
SI-6106	2"	100	1000	2¾" x 1½" x 4"	9 Lbs.
SI-6107	2½"	50	1000	3" x 1¾" x 4¾"	10 Lbs.
SI-6108	3"	50	1000	3" x 1¾" x 4¾"	11 Lbs.

DRIVE RING

Bellcore Specification: 6835

Part Number

PID Number



SI-6861 400 260 584

SI-6862 400 260 592

SI-6863 401 024 609

SI-6864 400 260 626

- Used for temporary or permanent support of drop wires
- Constructed of high quality steel, mechanically plated for durability

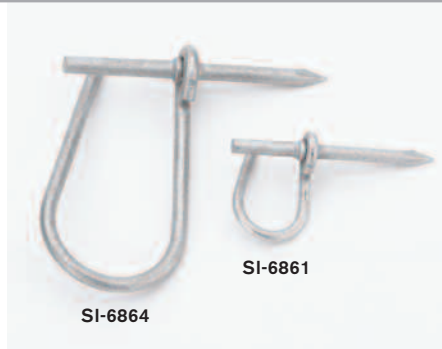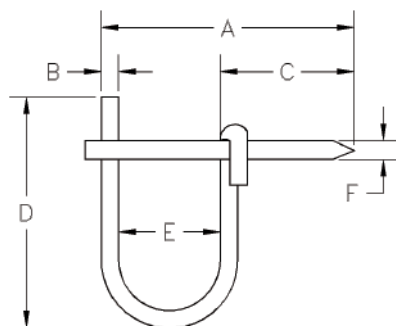

Part Number	Eye Diameter	Dimensions.....						Package Qty	Carton Qty	Carton Size	Carton Weight
		(A)	(B)	(C)	(D)	(E)	(F)				
SI-6861	½"	2¼"	.125"	1⅜"	¾"	½"	.120"	50	500	16" x 8" x 6"	23 Lbs.
SI-6862	⅝"	2¼"	.135"	1⅜"	1⅛"	⅝"	.165"	50	500	16" x 8" x 6"	25 Lbs.
SI-6863	⅞"	2⅞"	.177"	1½"	2⅞"	⅞"	.165"	25	200	16" x 8" x 6"	11 Lbs.
SI-6864	1¼"	2⅞"	.192"	1⅞"	2¾"	1¼"	.203"	25	250	16" x 8" x 6"	45 Lbs.

3/4" GROUND BRACKET

- Used to secure a tap to an MDU box or a pedestal
- Constructed of high quality steel, mechanically plated for durability

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0013	100	9" x 7" x 6"	13.5 Lbs.



ALUMINUM CABLE TIE

- Used to support drop cables on the strand, pedestal, lock box, or bundling of cables at the head end
- Reusable with integral buckle
- Made of soft aluminum
- Smooth edges to prevent damage to cable

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0939-7	7" x 1/4"	1000	9" x 5" x 5"	6 Lb.
SI-0939-10	10" x 1/4"	1000	9" x 5" x 5"	9 Lb.
SI-0939-12	12" x 1/4"	1000	16" x 8" x 6"	11 Lbs.



ID TAG

- Used to identify cables
- Made of aluminum
- Smooth edges to prevent injury or damage to cable
- Available with paint (contact factory for color options)

Part Number	Description	Carton Qty	Carton Size	Carton Weight
SI-TAG-101	Reusable w/integral buckle	1000	5" x 5" x 6"	6 Lbs.
SI-TAG-102	Center hole accommodates up to RG 6Q cable for use in MDV applications	1000	5" x 5" x 6"	5 Lbs.



PLASTIC CABLE CLAMP

- Secures cable to wood, masonry or metal surfaces
- Made of black nylon

Part Number	Inner Diameter	Clamp Mounting Hole Size	Carton Qty	Carton Size	Carton Weight
SI-0936	1/2"	1 1/4"	100	4" x 4" x 4"	1 Lb.
SI-0937	3/4"	1 1/4"	100	6" x 4" x 4"	1 Lb.
SI-0938	7/8"	1 1/4"	100	6" x 4" x 4"	1 Lb.



PLASTIC ANCHOR

- Used to retain screws in wallboard or concrete walls

Part Number	Screw Size	Drill Size	Length	Bag Qty	Carton Qty	Carton Size	Carton Weight
SI-00E6	#8-12	1/4"Ø	1 1/4"	1000	10,000	12" x 13" x 13"	16 Lbs.
SI-00E8	#12-16	5/16"Ø	1 1/2"	1000	10,000	17" x 14" x 15"	30 Lbs.



DRYWALL ANCHOR, SELF-DRILLING

- Used with #8 sheet metal screws
- Can be easily backed out
- Deep thread provides engagement in 3/8", 1/2" and 5/8" thick drywall
- No predrilling necessary



Part Number	Screw Size	Grip Range	Min. Thread Length	Bag Qty	Carton Qty	Carton Size	Carton Weight
SI-00E7	#8 x 1 1/2"	3/8" to 5/8"	1 1/2"	1000	10,000	14" x 14" x 8"	22 Lbs.

PLASTIC ANCHOR KIT

- Consists of: corrosion resistant zinc plated steel screws, high quality plastic wall anchors, and one carbide drill bit
- Kit comes with a reusable clear plastic box




Part Number	Items in Kit	Kit Qty	Carton Qty	Carton Size	Kit Weight	Carton Weight
SI-SK-8	100-D 10 Plastic Anchors	100	50	19" x 19" x 15"	0.62 Lbs.	32 Lbs.
	100-#8 x 1" Slot Hex Tapping Screws	100				
	1 5/16" x 4" Masonry Drill Bit	1				
SI-SK-10	100-D 12 Plastic Anchors	100	50	7" x 3 1/2" x 1 1/2"	0.62 Lbs.	52 Lbs.
	100-#10 x 1" Slot Hex Tapping Screws	100				
	1 1/4" x 4" Masonry Drill Bit	1				

ANGLE SCREW

Bellcore Specification: 6432

Product Number	PID Number
SI-7005	400 262 044
SI-7006	400 262 051

- Used with porcelain knobs to support drop wire runs
- Constructed of high quality steel, hot-dip galvanized
- Wood screw thread on one end and a machine screw thread on the other

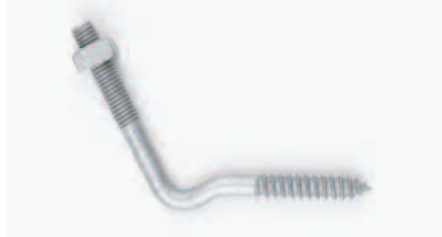

Part Number	Thread Size Machine Screw	Wood Screw	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-7005	5/16"	5/16" - 18	10	300	10" x 8" x 8"	30 Lbs.
SI-7006	3/8"	3/8" - 16	10	300	10" x 8" x 8"	48 Lbs.

TWO POST TERMINAL

- Designed for service drop applications of single pair distribution wire
- Constructed of aluminum and porcelain with brass grounding posts

Part Number	Box Qty	Carton Qty	Carton Size	Carton Weight
SI-7501	1	100	18" x 16" x 14"	40 Lbs.



BONDING AND GROUNDING PRODUCTS

Senior Industries Bonding & Grounding Products are engineered and manufactured in accordance with the National Electric Code and are UL and CSA listed.

From the first choice for bond attachment to the last alternative, Senior Industries products offer reliable solutions and ease of installation, backed with installation training to ensure the bonding effectiveness at all times. Mechanical plating is per ASTM B695. Hot-dip galvanizing is per ASTM A153.

For technical support, installation information and special requirements please contact our Inside Sales Team at: 1-800-350-1650, or via e-mail at: sales@seniorindustries.com

© 2010 Senior Industries, Inc. All rights reserved. Specifications subject to change without notice. Some products are non-standard and may be subject to longer lead time delivery and minimum order quantity requirements.

GROUND ROD CLAMP

Product Number	PID Number
SI-0038	401 140 546
SI-0038C	400 503 403

- Used to provide a solderless connection between a #6 ground wire and a ground rod
- The clamp is constructed of cast bronze
- Available in vibration proof, anti-loosening versions
- UL and CUL listed

SI-0038



SI-2142

SI-0038C



SI-2142-3G

Part Number	Type	Vibration Proof/ Anti-Loosening	Ground Rod Diameter	Bolt Hex Size	Conductor Range	Carton Quantity	Carton Size	Carton Weight
SI-0038	Heavy Duty	No	5/8"	1/2"	#10 SOL - #1/0 STR	400	10" x 9" x 9"	56 Lbs.
SI-0038C	Economy	No	5/8"	1/2"	#10 SOL - #1/0 STR	400	10" x 9" x 9"	42 Lbs.
SI-0038CN	Economy	Yes	5/8"	1/2"	#10 SOL - #1/0 STR	400	11" x 10" x 6"	42 Lbs.
SI-0038N	Heavy Duty	Yes	5/8"	1/2"	#10 SOL - #1/0 STR	300	10" x 9" x 6"	42 Lbs.
SI-2142	Heavy Duty	No	5/8"	9/16"	#12 SOL - #6 SOL	25	6" x 4" x 4"	11 Lbs.
SI-2142-3G	3 Ground Points	No	5/8"	9/16"	#12-6 SOL-#14-6 SOL or STR	25	6" x 4" x 4"	13 Lbs.

GROUNDING CONNECTOR

- Used to provide a solderless connection between ground wires
- Vise-type connectors made of corrosion resistant, high strength bronze
- Fast, easy installation
- Vibration proof connection
- V-grooves properly align the conductors for maximum engagement
- UL and CUL listed

SI-0082



SI-0081



Bellcore Specification: 8980

Product Number	PID Number
SI-0081 (H1)	403 370 075
SI-0082 (H2)	402 689 244

- 1/4 - 28 bolt size, 3/8" hex
- 1/4 - 28 bolt size, 3/8" hex



SI-0082JK

Part Number	Conductor Range AWG.....	Package Quantity	Carton Quantity	Carton Size	Carton Weight
	Min. Pair Max. Pair Set Screw/Stud				
SI-0081 (H1)	#12 SOL to #8 SOL #6 SOL to #6 SOL	5	500	10" x 6" x 6"	34 Lbs.
SI-0082 (H2)	#8 SOL to #5 SOL 1/0 to #4 SOL	5	375	10" x 8" x 6"	42 Lbs.
SI-0082JK (H2)	#8 SOL to #5 SOL 1/0 to #4 SOL #6 to #14 SOL	50	350	10" x 10" x 6"	45 Lbs.

Grounding Connector

- Used to provide a solderless connection between ground wires
- Vise-type connectors made of corrosion resistant, high strength bronze
- Fast, easy installation
- Vibration proof connection
- V-grooves properly align the conductors for maximum engagement
- UL and CUL listed

Part Number	Bellcore Specification	PID Number
SI-2169	7796-X-4	700 042 484
SI-2170	7796-X-6	402 841 175



SI-2169SS

SI-2170

Part Number	Conductor Range AWG		Bolt Size	Hex (In)	Carton Quantity	Carton Size	Carton Weight
	SOL	STR					
SI-2169	#4	#4	5/16" - 24	5/16"	350	10" x 10" x 6"	56 Lbs.
SI-2169-M	#4	#4	5/16" - 24	7/16"	350	10" x 10" x 6"	50 Lbs.
SI-2169SS	#4	#4	5/16" - 24	5/16"	250	10" x 10" x 6"	41 Lbs.
SI-2170	#6	#8	1/4" - 28	3/8"	500	9" x 9" x 6"	40 Lbs.

Grounding Connector

- Used to connect a bare #6 AWG copper ground wire to a jacketed #10 AWG copper ground wire
- Constructed of copper
- UL and CUL listed

Part Number	Conductor Sizes (AWG)	Bolt Size	Hex Size	Carton Qty	Carton Size	Carton Weight
SI-2180	#10 SOL & #6 SOL	1/4" - 20	3/8"	500	9" x 9" x 6"	24 Lbs.



Messenger Grounding Connector

Bellcore Specification: 8270
PID Number: 400 127 585

- Designed specifically for connecting a ground wire to figure 8 messenger strand, where self-supporting cable is used
- The teeth of the connector penetrate the insulation of the messenger to form a positive ground
- Constructed of tin-plated bronze
- UL and CUL listed

Part Number	Bolt Size	Hex (In)	Carton Qty	Carton Size	Carton Weight
SI-2172	5/16" - 24	5/16"	50	6" x 4" x 4"	12 Lbs.



BONDING RIBBON CONNECTOR

PID Number: 709 002 420
400 127 589


- Provides a solderless connection between bonding ribbons
- Accommodates up to three bonding ribbons and one #14 - #6 AWG wire
- Constructed of tin plated bronze
- Bolt size: 1/4" diameter with a 3/8" hex head
- UL and CUL listed

Part Number	Carton Qty	Carton Size	Master Qty	Master Size	Master Weight
SI-2159	50	3" x 4" x 5"	500	16" x 8" x 6"	49 Lbs.



Bonding Ribbon Connector

- No special preparation/cleaning of the surfaces required to electrically join two copper bonding ribbons, the patented screw design (cone and screw tip) penetrates corroded surfaces
- Non-corrosive all bronze construction
- Eliminates the need to solder the ribbons
- UL listed
- Patented

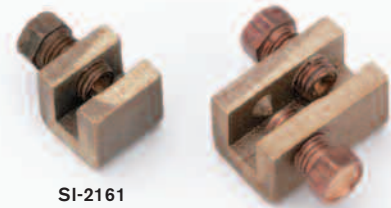

SI-2161


SI-2162

Part Number	Type	Carton Qty	Carton Size	Master Qty	Master Size	Master Weight
SI-2161	Single	50	3" x 4" x 5"	300	10" x 8" x 6"	21 Lbs.
SI-2162	Double	50	3" x 4" x 5"	300	10" x 8" x 6"	36 Lbs.

DISTRIBUTION CONNECTOR

- Used to provide a solderless connection between ground wires
- Vise-type connectors made of corrosion resistant, high strength bronze
- Fast, easy installation
- Vibration proof connection
- V-grooves properly align the conductors for maximum engagement
- UL and CSA listed

Part Number	Conductor Range		Bolt Size	Hex (In)	Carton Quantity	Carton Size	Carton Weight
	Min.	Max.					
SI-2140	2-#2 SOL	2-2/0 STR	5/8" - 24	5/16"	25	6" x 4" x 4"	10 Lbs.
SI-2141	2-#4 SOL	2-#2 STR	5/8" - 24	5/16"	250	10" x 10" x 6"	56 Lbs.
SI-2143	2-#1/0 SOL	2-4/0 STR	5/8" - 24	5/16"	25	6" x 4 1/2" x 4 1/2"	11 Lbs.

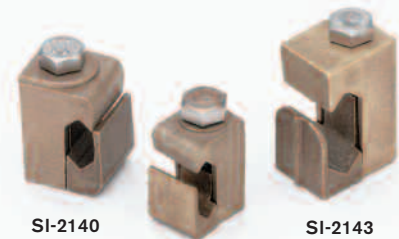

SI-2140

SI-2141

SI-2143

PID Number: 000 204 784

- Design allows for easy tapping or covering of the connection
- Flat ribs on the back of the connector provides a secure grip for hot stick installations
- Designed to meet all ANSI specifications
- Clamp will close on any combination of two conductors shown in the chart below
- UL and CUL listed



Part Number	Conductor Range			Approximate Dimensions			Bolt Size	Hex (In)	Carton Quantity	Carton Weight
	Max. SOL	Min. SOL	STR	A	B	C				
SI-2173	#1/0	#1	#8	1 1/2"	1 3/8"	1"	5/8" - 24	5/16"	50	12 Lbs.

- Vise-type bronze connector
- Interlocking components to ensure a long term, vibration proof connection
- One piece, side opening design to eliminate loose parts, cross threading, and ease of installation on run conductor
- Easy to install with gloves or hot sticks
- Can be used on structures, cabinets, and enclosures for grounding applications
- Connector will close on any combination of two conductors listed within the range shown in the chart below
- UL and CUL listed




Part Number	Conductor Range		Bolt Thread Size	Bolt Hex Size	Package Qty	Carton Qty	Carton Size	Carton Weight
	Min./SOL	Max./STR						
SI-2179	#8	#1/0	5/8" - 24	5/16"	30	240	10" x 8 1/2" x 7 1/2"	38 Lbs.

STRUCTURE I-BEAM GROUND CLAMP

PID Number: 000 213 140

- Used to provide an electrical connection to trailers, mobile homes or other beam structures
- High strength bronze casting
- Will accept wire range from #14 AWG to #6 AWG including bonding ribbon
- UL and CUL listed


Part Number	Carton Qty	Master Qty	Carton Size	Carton Weight
SI-2145	20	200	16" x 8" x 6"	56 Lbs.
SI-2145A	20	200	16" x 8" x 6"	56 Lbs.

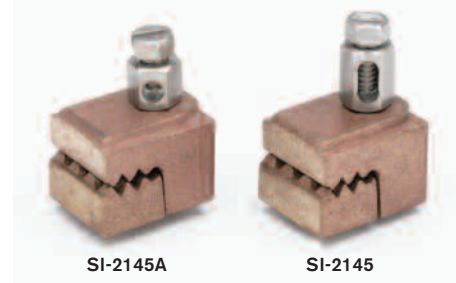

PID Number: 000 213 140


- Provides an electrical bond between a ground wire and flat surface, up to 3/8" thick, regardless of surface condition
- High strength bronze
- Patented screw design (cone & tip arrangement) for intimate ground to base metal
- Separate screw to attach #14 to #6 AWG, stranded or solid ground wires that can be attached or removed without loosening the clamp
- The clamp installs with a 7/16" hex drive wrench and a 3/8" hex drive wrench is used to set the ground screw
- The SI-2160S provides an elongated hole for connecting multiple wires/bonding ribbon
- UL and CUL listed
- Patented

Part Number	Type	Carton Qty	Carton Size	Master Qty	Master Size	Master Weight
SI-2160	Structure Ground Clamp	10	3" x 4" x 5"	100	16" x 8" x 6"	41 Lbs.
SI-2160S	Structure Ground Clamp with Elongated Hole	10	3" x 4" x 5"	100	16" x 8" x 6"	41 Lbs.

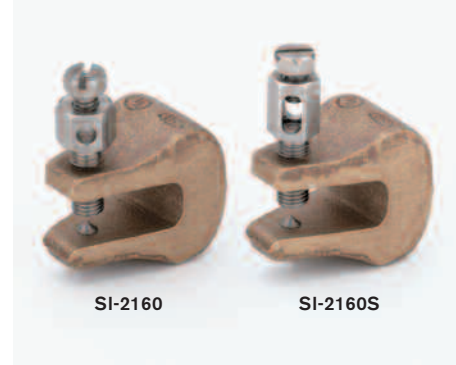

- Used to provide an electrical connection to trailers, mobile homes or other beam structures
- Cup point on bolt penetrates through surface paint or oxide for intimate ground to base metal
- Separate screw to attach #14 to #6 AWG ground wires
- High strength bronze casting
- UL and CUL listed

Part Number	Bolt Head	Carton Quantity	Carton Size	Carton Weight
SI-2181	Square	50	7" x 5 1/2" x 3 1/2"	17 Lbs.
SI-2181A	Hex	50	7" x 5 1/2" x 3 1/2"	17 Lbs.

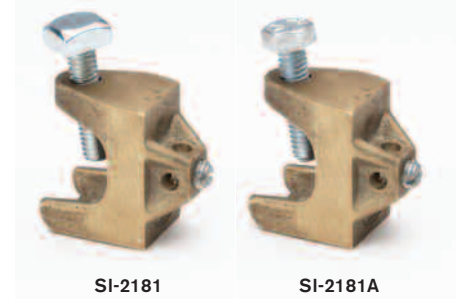

- Used for grounding Satellite and CATV systems to an I-Beam
- The teeth on bracket help penetrate paint and rust to ensure a strong grounding connection
- Constructed of high quality steel, mechanically plated
- UL and CUL listed

Part Number	Carton Quantity	Carton Size	Carton Weight
SI-2177	100	9" x 5 1/2" x 5"	16 Lbs.



BONDING AND GROUNDING PRODUCTS

KUL BONDING CLAMP

- Used to bond #6 copper wire to ¼" or ⅝" strand
- Constructed of high strength copper alloy
- Installation does not require removal of bolt
- Tin plated for use with dissimilar metals
- Installs with standard terminal wrench
- UL and CUL listed


Part Number	Conductor Range	Package Quantity	Carton Quantity	Carton Size	Carton Weight
SI-2174	#6 SOL - #1/0 STR	100	400	13" x 11½" x 5½"	70 Lbs.



WATER PIPE GROUND CLAMP

- Ideal in bonding copper ground wire to galvanized or copper pipe and conduit
- SI-5947 accepts from #10 to #6 AWG copper wire
- SI-5948 Series accepts from #14 to #6 AWG copper wire
- UL and CUL listed


Part Number	Size	Material	Carton Qty	Carton Size	Carton Weight
SI-5947	1¼" - 2"	Bronze	100	13" x 8" x 8"	39 Lbs.
SI-5948	½" - ¾" - 1"	Bronze	250	9" x 7" x 6"	44 Lbs.
SI-5948G	½" - ¾" - 1"	Bronze	250	9" x 7" x 6"	48 Lbs.
SI-5948Z	½" - ¾" - 1"	Die Cast Zinc	250	9" x 7" x 6"	35 Lbs.

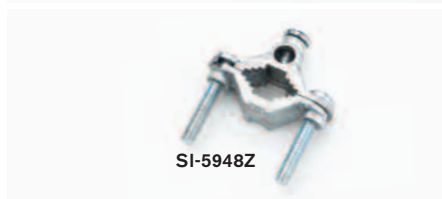

SPLIT BOLT

- High strength corrosion resistant copper alloy connectors for use in bonding applications
- Designed to provide high clamping force
- Split bolt will accept on any combination of two conductors shown in the chart below
- UL and CUL listed

Part Number	Size	Range of Equal Main and Tap		Min. Tap with One Max. Main	Package Quantity	Package Weight	Carton Quantity	Carton Weight
		Min.	Max.					
SI-2002	2	#6 SOL	#2 STR	#14 STR	50	10 Lbs.	400	44 Lbs.
SI-2004	4	#8 SOL	#4 SOL	#16 SOL	100	7 Lbs.	800	53 Lbs.
SI-2006	6	#10 SOL	#6 SOL	#16 SOL	100	5 Lbs.	800	40 Lbs.
SI-2008	8	#16 STR	#8 STR	#16 STR	200	6 Lbs.	1600	47 Lbs.

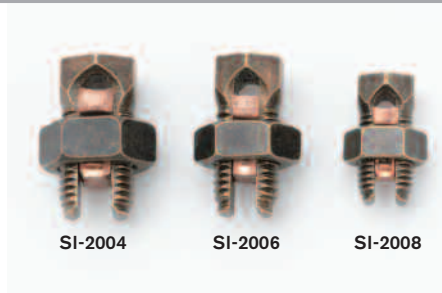

BONDING SCREW

- Used in dropline or other bonding applications
- Constructed of die cast zinc




Assembly Part Number	U-Bolt Part Number	U-Bolt Size	U-Bolt Head Type	Nut Part Number	Nut Thread Size	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-UBN-12R	SI-UB-12R	½"	Round	SI-N-12R	½ - 20	100	800	10" x 9" x 7"	20 Lbs.
SI-UBN-58R	SI-UB-58R	⅝"	Round	SI-N-58R	⅝ - 18	100	800	10" x 9" x 7"	24 Lbs.

GROUND BLOCK

- Provides ground path between drop cable and ground wire
- Stainless steel construction
- New ground clip mechanism provides for fast and easy termination of up to a #10 ground wire
- Other variations available
- Includes one 2.2 GHz F81 connector installed
- Integrated seal gasket
- Meets SCTE Specifications
- UL and CUL listed
- Patented

Part Number	Description	Carton Qty	Carton Size	Carton Weight
SI-GB-10	Single, 1 F Connector	120	14" x 5" x 7"	10 Lbs.
SI-GB-20	Dual, 1 F Connector	100	14" x 5" x 7"	10 Lbs.
SI-GB-22	Dual, 2 F Connectors	100	14" x 5" x 7"	17 Lbs.
SI-GB-50	Single, 1 Sealed Gasket F Connector	120	14" x 5" x 7"	11 Lbs.
SI-GB-50SS	Single, 1 Sealed Gasket F Conn w/screws	120	14" x 5" x 7"	11 Lbs.
SI-GB-50L	Single, 1 Sealed Gasket Long F Conn	120	14" x 5" x 7"	13 Lbs.
SI-GB-60	Dual, 1 Sealed Gasket F Connector	100	14" x 5" x 7"	12 Lbs.
SI-GB-65	Dual, 2 Sealed Gasket F Connectors	100	14" x 5" x 7"	14 Lbs.
SI-GB-65SS	Dual, 2 Sealed Gasket F Conn w/screws	100	14" x 5" x 7"	12 Lbs.

Ground blocks available without F connector

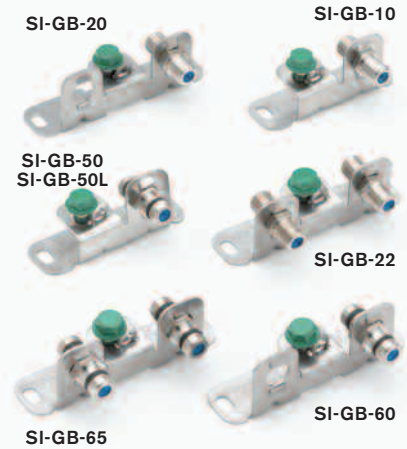

F81 SPLICE CONNECTOR

- Constructed of nickel plated brass
- Multi-point 360° beryllium copper socket, gold plating
- 2.2 GHz. F type female on each end

Part Number	Description	Carton Qty	Carton Size	Carton Weight
SI-SP-81	Standard F Connector	2000	16" x 11" x 6"	36 Lbs.
SI-SG-81	Sealed Gasket F Connector	2000	16" x 11" x 6"	37 Lbs.
SI-SGL-81	Sealed Gasket Long F Connector	2000	16" x 11" x 6"	39 Lbs.



ZINC GROUND BLOCK

- Provides for fast and easy termination of up to a #10 ground wire
- Constructed of zinc die cast, nickel finish
- Each part includes 2 mounting screws

Part Number	Description	Carton Qty	Carton Size	Carton Weight
SI-GBZ-11	Single F81, 1 bonding screw	150	23½" x 9" x 9"	14 Lbs.
SI-GBZ-22	Dual F81, 2 bonding screws	150	23½" x 9" x 9"	19 Lbs.
SI-GBZ-23	Dual F81, 3 bonding screws	150	23½" x 9" x 9"	22 Lbs.
SI-GBZ-44	Quad F81, 4 bonding screws	180	23½" x 9" x 9"	31 Lbs.



ID GROUND TAG

- Used to identify grounding connections
- Made of aluminum, green paint


Part Number	Type	Carton Qty	Carton Size	Carton Weight
SI-TAG-100-G	CATV Ground	2000	14" x 5½" x 5½"	12 Lbs.
SI-TAG-103-G	Dish Ground	2000	14" x 5½" x 5½"	12 Lbs.
SI-TAG-104-G	Satellite Ground	2000	14" x 5½" x 5½"	12 Lbs.



BONDING AND GROUNDING PRODUCTS

GROUND LUG

- For mechanically bonding ground wire to equipment or satellite dish installations
- Set screw can be easily installed using a flat head screwdriver or if hex head using the SI-7195 can wrench
- UL and CUL listed

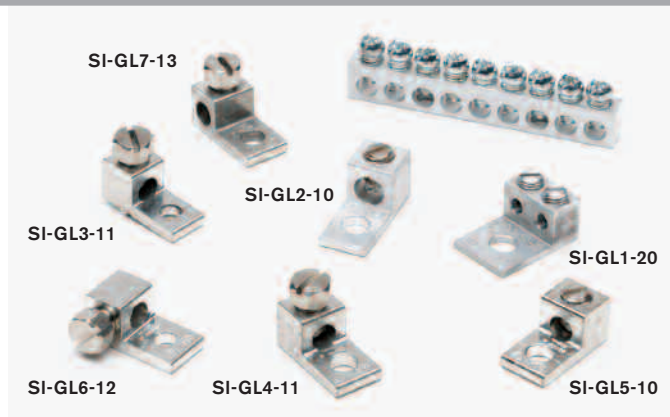

Part Number	Type	Material	Bonding Screw	Conductor Range	Mtg. Hole	Set Screw	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-GL1-20	Dual Barrel	Aluminum	Top	#17 - #10	17/64"	2 slotted headless	500	3000	17" x 10 1/2" x 11 1/2"	54 Lbs.
SI-GL2-10	Single	Aluminum	Top	#14 - #6	17/64"	1 slotted headless	500	3000	17" x 10 1/2" x 11 1/2"	47 Lbs.
SI-GL3-11	Single Bottom Tab	Tinned Bronze	Top	#14 - #4	13/64"	hex	250	1000	12 1/2" x 8" x 8 1/2"	45 Lbs.
SI-GL4-11	Single	Tinned Bronze	Top	#14 - #4	17/64"	hex	250	1000	12 1/2" x 8" x 8 1/2"	50 Lbs.
SI-GL5-10	Single	Tinned Bronze	Top	#14 - #4	17/64"	1 slotted headless	250	1000	12 1/2" x 8" x 8 1/2"	50 Lbs.
SI-GL6-12	Single	Tinned Bronze	Side	#14 - #4	13/64"	hex	100	1000	12 1/2" x 8" x 8 1/2"	49 Lbs.
SI-GL7-13	Single	Tinned Bronze	Top with side grd.	#14 - #4	17/64"	hex	250	1000	12" x 9" x 8"	49 Lbs.

TAP CLAMP

- Used to make an electrical connection between ground wire and messenger or guy strands
- Up to #6 AWG ground wire
- Up to 7/16" strand size
- Constructed of aluminum



Part Number	Carton Quantity	Carton Size	Carton Weight
SI-2174TC	84	14" x 5 1/2" x 5 1/2"	10 Lbs.

B STRAND GROUND CLAMP

Bellcore Specification: 7182
PID Number: 000 542 091

- Used to secure cable sheath, bonding ribbon or ground wire to the messenger strand
- Internal self seating compression plate to evenly distribute clamping pressure
- Constructed of high quality steel, hot-dip galvanized for maximum corrosion protection



Part Number	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-1630	25	100	9" x 7" x 7"	51 Lbs.

COUPLING

- Used to join two or more sections of 5/8" ground rods
- Extra long for greater engagement of ground rods
- Extra length prevents loosening while being pounded into the ground


Part Number	Material	Carton Quantity	Carton Size	Carton Weight
SI-2290	Bronze	200	10" x 9" x 7"	50 Lbs.
SI-3910	Galvanized Steel	200	10" x 9" x 7"	50 Lbs.




UNIVERSAL GROUND STRAP CLAMP

PID Number: 243 002 540

- Positive grounding connection to water pipes, electrical conduits & ground rods
- Features new captive nut, which prevents loss of nut during installation
- Features patented curved nut, which gives a more reliable, secure connection to pipe
- Set-screw stud assembly is compatible with a standard terminal wrench
- Set-screw stud assembly allows ground wire changes without loosening clamp
- Available in 6, 9, or 12 inch lengths with copper or galvanized steel straps
- Available with a penetrator option to ensure a positive, reliable ground
- Can accommodate ground wires up to #6 AWG
- UL and CUL listed
- Patented

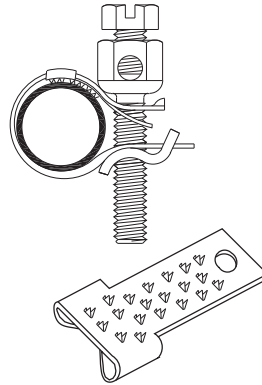

SI-0954 series clamps also available with penetrator. To order, add "P" suffix to part number.

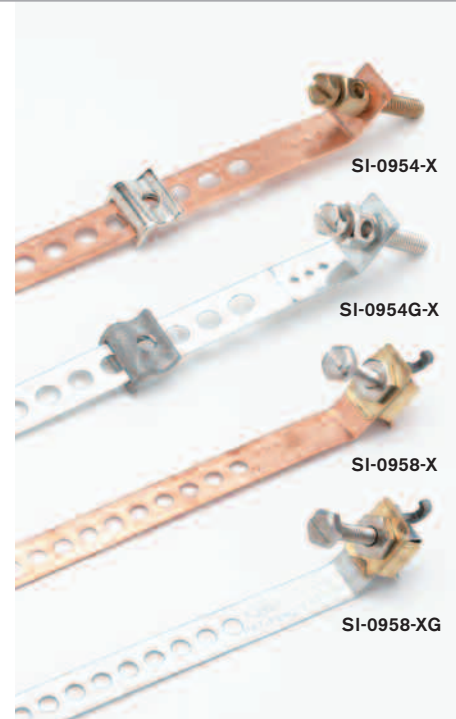

Part Number	Type	Strap Material	Strap Length	Pipe Size Dia. (In)	Package Quantity	Carton Quantity	Carton Size	Carton Weight
SI-0954-6	Premium	Copper	6"	½" - 1"	25	100	4¼" x 4¼" x 12"	2 Lbs.
SI-0954-9	Premium	Copper	9"	½" - 2¼"	25	100	4¼" x 4¼" x 12"	3 Lbs.
SI-0954-12	Premium	Copper	12"	½" - 3"	25	100	4¼" x 4¼" x 12"	4 Lbs.
SI-0954G-6	Premium	Galvanized Steel	6"	½" - 1"	25	100	4¼" x 4¼" x 12"	2 Lbs.
SI-0954G-9	Premium	Galvanized Steel	9"	½" - 2¼"	25	100	4¼" x 4¼" x 12"	3 Lbs.
SI-0954G-12	Premium	Galvanized Steel	12"	½" - 3"	25	100	4¼" x 4¼" x 12"	4 Lbs.
SI-0958-6	Economy	Copper	6"	½" - 1"	10	100	18" x 16" x 14"	5 Lbs.
SI-0958-9	Economy	Copper	9"	½" - 2¼"	10	100	18" x 16" x 14"	6 Lbs.
SI-0958-12	Economy	Copper	12"	½" - 3"	10	100	18" x 16" x 14"	7 Lbs.
SI-0958-6G	Economy	Galvanized Steel	6"	½" - 1"	10	100	18" x 16" x 14"	5 Lbs.
SI-0958-9G	Economy	Galvanized Steel	9"	½" - 2¼"	10	100	18" x 16" x 14"	6 Lbs.
SI-0958-12G	Economy	Galvanized Steel	12"	½" - 3"	10	100	18" x 16" x 14"	7 Lbs.

B GROUND WIRE CLAMP

Bellcore Specification: 8451

- B ground wire clamp is used to secure ground wires, #6 - #12 AWG
- Constructed of high quality steel, mechanically plated for corrosion resistance

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0960	500	3" x 3" x 3"	1.5 Lbs.



BONDING RIBBON CLAMP

Bellcore Specification: 6567

PID Number: 400 121 364

- Used for attaching bonding ribbon to manhole walls and roofs
- Constructed of lead

Part Number	Carton Qty	Carton Size	Carton Weight
SI-1720	200	2¾" x 1⅞" x 3⅛"	5 Lbs.



BONDING AND GROUNDING PRODUCTS

METER BOX CLAMP

Part Number	PID Number
SI-2166SS	000 134 971
SI-2166LS	000 134 989

- Engineered to provide a positive ground connection to customer meter boxes without the need for a ground rod, ground rod clamp, or long ground wire runs
- Patented screw design (cone & tip arrangement) for intimate ground to base metal
- No preparation of meter box surface required
- No need to loosen clamp to attach or remove ground wires
- UL and CUL listed
- Patented



Part Number	Type	Material	Conductor Ranges	Carton Quantity	Carton Size	Carton Weight
SI-2154	Adjustable Bracket	Galvanized Steel	#14 - #6	50	12" x 6" x 6"	33 Lbs.
SI-2163	Plate Style	Stainless Steel	#14 - #10	200	13" x 5" x 7"	16 Lbs.
SI-2165	Adjustable Bracket	Stainless Steel	#14 - #6	50	12" x 6" x 6"	32 Lbs.
SI-2166SG	Adjustable Bracket, Short	Galvanized Steel	#14 - #6	20	4 1/4" x 4 1/4" x 12"	10 Lbs.
SI-2166LG	Adjustable Bracket, Long	Galvanized Steel	#14 - #6	20	4 1/4" x 4 1/4" x 12"	12 Lbs.
SI-2166SS	Adjustable Bracket, Short	Stainless Steel	#14 - #6	20	4 1/4" x 4 1/4" x 12"	10 Lbs.
SI-2166LS	Adjustable Bracket, Long	Stainless Steel	#14 - #6	20	4 1/4" x 4 1/4" x 12"	13 Lbs.
SI-2167	Lip Mount	Powder Coated Spring Steel	#14 - #6	50	3" x 4" x 5"	3.5 Lbs.
SI-2167C	Lip Mount Economy	Powder Coated Spring Steel	#14 - #6	50	3" x 4" x 5"	3.5 Lbs.
SI-2167GC	Lip Mount w/Ground Clip	Stainless Steel	#12 - #10	50	3" x 4" x 5"	3.5 Lbs.
SI-2167SLM	Side Lip Mount	Powder Coated Stainless Steel	#14 - #6	60	10" x 7" x 1"	4.4 Lbs.
SI-2167SLM-WL	Side Lip Mt., Wide Lip	Powder Coated Stainless Steel	#14 - #6	50	10" x 7" x 1"	5 Lbs.
SI-2167SLM-3G	3 Grd Side Lip Mount	Powder Coated Stainless Steel	#14 - #6	25	10" x 7" x 1"	3.5 Lbs.
SI-2168CA	Corner Mount	Steel, Zinc w/Yellow Dichromate	#14 - #10	50	9" x 5 1/2" x 1 1/2"	3 Lbs.

GROUND WIRE

- Used in butt grounds, power service grounds
- #6 AWG conductor
- Annealed solid copper conductor, bare or tinned
- UL and CUL listed

Part Number	AWG Size	Bare/Tinned	Feet per Spool	Spools per Carton	Carton Size	Carton Weight
SI-9541	6	Bare	300	2	12" x 12" x 8 1/2"	55 Lbs.
SI-9542	2	Tinned	250	1	12" x 12" x 6"	53 Lbs.
SI-9543	6	Tinned	315	2	12" x 12" x 8 1/2"	50.5 Lbs.
SI-9544	4	Bare	198	1	12" x 12" x 6"	25 Lbs.
SI-9545	4	Tinned	198	1	12" x 12" x 6"	25 Lbs.
SI-9546	10	Green Jacketed 10TW	500	1	12" x 12" x 6"	15 Lbs.



COPPER BOND BAR

Belcore Specification: 4079

PID Number: 045 022 688

- Provides low electrical resistance connection for bonding splices
- ½" wide tin-plated copper strap, #6 AWG conductor equivalent
- Mounts to variably spaced bond studs and standard terminal blocks

Part Number	Feet/Roll	Rolls/Carton	Carton Size	Carton Weight
SI-3720	25'	10	8" x 8" x 6"	19 Lbs.



BONDING RIBBON

Belcore Specification: 6868

PID Number: 400 260 337

- Used for bonding cable
- Annealed solid copper ribbon
- ¾" wide by ⅛" thick
- Rolled edges and tinned finish

Part Number	Lbs/Spool	Spools/Carton	Carton Size	Carton Weight
SI-1638	5 Lbs.	10	12" x 12" x 5"	54 Lbs.



BOND BRAID

Belcore Specification: 1036

- Used in splicing cable shield openings within pedestal terminals or splice closures
- Flat, tin plated copper braided conductor, ½" wide, .070" thick, that provides a low electrical resistance connection
- Equivalent to a number #6 AWG copper conductor
- The braid is strong enough to be effective in relieving the strain across a spliced cable

Part Number	Feet/Reel	Reels/Carton	Carton Size	Carton Weight
SI-7171	100'	5	14" x 14" x 8"	43 Lbs.



BOND BRAID WITH EYELETS

PID Number: 701 227 456

- Flat, tin plated copper braided conductor, ½" wide, .070" thick, that provides a low electrical resistance connection
- Eyelets are ¼" diameter and spaced every three inches

Part Number	Type	Feet per Pack	Packs per Carton	Carton Size	Carton Weight
SI-7177-1	Without Web Guard	25'	7	13" x 8" x 8"	21 Lbs.



MULTIPLE GROUND BAR

- Used to bond multiple ground wires in MDU applications
- Accepts #12 - #6 AWG copper ground wire
- Nickel plated brass construction
- Grounding clip/screw assembly is stainless steel
- Stud/set screw brass, nickel plated
- UL and CUL listed

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2010	50	10½" x 4¼" x 9"	17 Lbs.



BONDING AND GROUNDING PRODUCTS

TAP GROUNDING CLAMP

- Used to bond taps
- Accepts #12 - #6 AWG copper ground wire
- Bracket constructed of high quality steel, mechanically plated
- Stud/set screw brass, nickel plated
- UL and CUL listed

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2020	200	14" x 5" x 5 $\frac{3}{4}$ "	30 Lbs.



DEMARCATON PLATE

- Used to bond drop cable in MDU applications
- 8 ports
- -81 version is populated with F connectors
- Accepts #12 - #6 AWG copper ground wire
- Aluminum construction
- Stud/set screw brass, nickel plated
- UL and CUL listed

Part Number	L x W x H	Carton Qty	Carton Size	Carton Weight
SI-2030	4" x 1 $\frac{5}{16}$ " x 2 $\frac{1}{8}$ "	100	14" x 5 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ "	9 Lbs.
SI-2030-81	4" x 1 $\frac{5}{16}$ " x 2 $\frac{1}{8}$ "	100	12" x 12" x 6"	26 Lbs.



- Used to bond drop cable in MDU applications
- 16 ports
- -81 version is populated with F connectors
- Accepts #12 - #6 AWG copper ground wire
- Aluminum construction
- Stud/set screw brass, nickel plated
- UL and CUL listed

Part Number	L x W x H	Carton Qty	Carton Size	Carton Weight
SI-2040	6 $\frac{1}{4}$ " x 1 $\frac{7}{16}$ " x 3 $\frac{13}{32}$ "	50	14" x 5 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ "	7 Lbs.
SI-2040-81	6 $\frac{1}{4}$ " x 1 $\frac{7}{16}$ " x 3 $\frac{13}{32}$ "	50	14" x 5 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ "	9 Lbs.



WIRE TERMINAL

- Tin plated copper material
- Screw-on ring terminal for solid #6 AWG
- Self-threading terminal cuts through any oxidation
- Fits #10 through 1/4" studs
- Installs with the standard 3/8", SI-7195 Terminal Wrench

Part Number	Mounting Hole	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-WT-6T-250	1/4" dia.	100	1000	9" x 9" x 6"	13 Lbs.



BONDING HARNESS - #14 AWG

- Ring terminal on both ends for cable splices
- Tinned brass ring terminals
- Tinned copper strand cable
- Colored insulation for multi-directional cable identification

Ordering Information

- **X** in each Part Number denotes **Color of Insulation** options:
Blank - Green (Std.), **OR** - Orange, **BL** - Blue, **BR** - Brown, **SL** - Slate, **GR** - Green, **R** - Red.



SI-BH-1410-RR

Part Number	Insulated/Uninsulated	Cable Length	Ring Type Both Ends	Bundle Qty	Carton Qty	Carton Size	Carton Weight
SI-BH-1410-RRX	Insulated	10"	#10	25	200	9" x 9" x 6"	4 Lbs.
SI-BH-1420-RRX	Insulated	20"	#10	25	200	9" x 9" x 6"	7 Lbs.

BONDING HARNESS - #6 AWG

- For bonding and grounding in pedestal new construction and retrofitting
- Colored insulation for multi-directional cable identification
- Ring terminals - standard mounting hole sizes #10 and 1/4"
- Rope-lay cable, tinned copper strands
- Ring terminals - tinned copper alloy, terminate harnesses at each end

Ordering Information

- **Y** in each Part Number denotes three cable type options:

SI-BHA-XXXX Series

427-strand, 7 braid x 61/32 rope-lay cable

SI-BHB-XXXX Series

665-strand, 7 braid x 95/34 rope-lay cable

SI-BHC-XXXX Series

7-strand

- **X** in each Part Number denotes **Color of Insulation** options:
Blank - Black, **OR** - Orange, **BL** - Blue, **BR** - Brown, **SL** - Slate, **GR** - Green, **R** - Red.



Part Number	Insulated/Uninsulated	Cable Length	Ring Type Both Ends	Bundle Qty	Carton Qty	Carton Size	Carton Weight
SI-BHY-6U25	Uninsulated	6"	1/4"	10	500	22" x 8" x 8"	32
SI-BHY-8U25	Uninsulated	8"	1/4"	10	500	22" x 8" x 8"	42
SI-BHY-11U25	Uninsulated	11"	1/4"	10	200	22" x 8" x 8"	22
SI-BHY-12U25	Uninsulated	12"	1/4"	10	200	22" x 8" x 8"	25
SI-BHY-15U25	Uninsulated	15"	1/4"	10	200	22" x 8" x 8"	31
SI-BHY-18U25	Uninsulated	18"	1/4"	10	200	22" x 8" x 8"	39
SI-BHY-20U25	Uninsulated	20"	1/4"	10	200	22" x 8" x 8"	42
SI-BHY-24U25	Uninsulated	24"	1/4"	10	200	25" x 8" x 8"	50
SI-BHY-26U25	Uninsulated	26"	1/4"	10	200	27" x 8" x 8"	54
SI-BHY-30U25	Uninsulated	30"	1/4"	10	200	31" x 8" x 8"	62
SI-BHY-36U25	Uninsulated	36"	1/4"	10	200	37" x 8" x 8"	73
SI-BHY-6U10	Uninsulated	6"	#10	10	500	22" x 8" x 8"	32
SI-BHY-8U10	Uninsulated	8"	#10	10	500	22" x 8" x 8"	43
SI-BHY-11U10	Uninsulated	11"	#10	10	200	22" x 8" x 8"	22
SI-BHY-12U10	Uninsulated	12"	#10	10	200	22" x 8" x 8"	25
SI-BHY-15U10	Uninsulated	15"	#10	10	200	22" x 8" x 8"	31
SI-BHY-18U10	Uninsulated	18"	#10	10	200	22" x 8" x 8"	39
SI-BHY-20U10	Uninsulated	20"	#10	10	200	22" x 8" x 8"	42
SI-BHY-24U10	Uninsulated	24"	#10	10	200	25" x 8" x 8"	50
SI-BHY-26U10	Uninsulated	26"	#10	10	200	27" x 8" x 8"	54
SI-BHY-30U10	Uninsulated	30"	#10	10	200	31" x 8" x 8"	62
SI-BHY-36U10	Uninsulated	36"	#10	10	200	37" x 8" x 8"	73
SI-BHY-6U8	Uninsulated	6"	#8	10	500	22" x 8" x 8"	32
SI-BHY-8U8	Uninsulated	8"	#8	10	500	22" x 8" x 8"	42
SI-BHY-11U8	Uninsulated	11"	#8	10	200	22" x 8" x 8"	22
SI-BHY-12U8	Uninsulated	12"	#8	10	200	22" x 8" x 8"	25
SI-BHY-15U8	Uninsulated	15"	#8	10	200	22" x 8" x 8"	31
SI-BHY-18U8	Uninsulated	18"	#8	10	200	22" x 8" x 8"	39
SI-BHY-20U8	Uninsulated	20"	#8	10	200	22" x 8" x 8"	42
SI-BHY-24U8	Uninsulated	24"	#8	10	200	25" x 8" x 8"	50
SI-BHY-26U8	Uninsulated	26"	#8	10	200	27" x 8" x 8"	54
SI-BHY-30U8	Uninsulated	30"	#8	10	200	31" x 8" x 8"	62
SI-BHY-36U8	Uninsulated	36"	#8	10	200	37" x 8" x 8"	73

BONDING AND GROUNDING PRODUCTS

Part Number	Insulated/ Uninsulated	Cable Length	Ring Type Both Ends	Bundle QTY	Carton Qty	Carton Size	Carton Weight
SI-BHY-6U6	Uninsulated	6"	#6	10	500	22" x 8" x 8"	32
SI-BHY-8U6	Uninsulated	8"	#6	10	500	22" x 8" x 8"	42
SI-BHY-11U6	Uninsulated	11"	#6	10	200	22" x 8" x 8"	22
SI-BHY-12U6	Uninsulated	12"	#6	10	200	22" x 8" x 8"	25
SI-BHY-15U6	Uninsulated	15"	#6	10	200	22" x 8" x 8"	31
SI-BHY-18U6	Uninsulated	18"	#6	10	200	22" x 8" x 8"	39
SI-BHY-20U6	Uninsulated	20"	#6	10	200	22" x 8" x 8"	42
SI-BHY-24U6	Uninsulated	24"	#6	10	200	25" x 8" x 8"	50
SI-BHY-26U6	Uninsulated	26"	#6	10	200	27" x 8" x 8"	54
SI-BHY-30U6	Uninsulated	30"	#6	10	200	31" x 8" x 8"	62
SI-BHY-36U6	Uninsulated	36"	#6	10	200	37" x 8" x 8"	73
SI-BHY-625X	Insulated	6"	1/4"	10	500	22" x 8" x 8"	33
SI-BHY-825X	Insulated	8"	1/4"	10	500	22" x 8" x 8"	43
SI-BHY-1125X	Insulated	11"	1/4"	10	200	22" x 8" x 8"	23
SI-BHY-1225X	Insulated	12"	1/4"	10	200	22" x 8" x 8"	26
SI-BHY-1525X	Insulated	15"	1/4"	10	200	22" x 8" x 8"	32
SI-BHY-1825X	Insulated	18"	1/4"	10	200	22" x 8" x 8"	40
SI-BHY-2025X	Insulated	20"	1/4"	10	200	22" x 8" x 8"	43
SI-BHY-2425X	Insulated	24"	1/4"	10	200	25" x 8" x 8"	51
SI-BHY-2625X	Insulated	26"	1/4"	10	200	27" x 8" x 8"	55
SI-BHY-3025X	Insulated	30"	1/4"	10	200	31" x 8" x 8"	63
SI-BHY-3625X	Insulated	36"	1/4"	10	200	37" x 8" x 8"	74
SI-BHY-610X	Insulated	6"	#10	10	500	22" x 8" x 8"	33
SI-BHY-810X	Insulated	8"	#10	10	500	22" x 8" x 8"	43
SI-BHY-1110X	Insulated	11"	#10	10	200	22" x 8" x 8"	23
SI-BHY-1210X	Insulated	12"	#10	10	200	22" x 8" x 8"	26
SI-BHY-1510X	Insulated	15"	#10	10	200	22" x 8" x 8"	32
SI-BHY-1810X	Insulated	18"	#10	10	200	22" x 8" x 8"	40
SI-BHY-2010X	Insulated	20"	#10	10	200	22" x 8" x 8"	43
SI-BHY-2410X	Insulated	24"	#10	10	200	25" x 8" x 8"	51
SI-BHY-2610X	Insulated	26"	#10	10	200	27" x 8" x 8"	55
SI-BHY-3010X	Insulated	30"	#10	10	200	31" x 8" x 8"	63
SI-BHY-3610X	Insulated	36"	#10	10	200	37" x 8" x 8"	74
SI-BHY-68X	Insulated	6"	#8	10	500	22" x 8" x 8"	33
SI-BHY-88X	Insulated	8"	#8	10	500	22" x 8" x 8"	43
SI-BHY-118X	Insulated	11"	#8	10	200	22" x 8" x 8"	23
SI-BHY-128X	Insulated	12"	#8	10	200	22" x 8" x 8"	26
SI-BHY-158X	Insulated	15"	#8	10	200	22" x 8" x 8"	32
SI-BHY-188X	Insulated	18"	#8	10	200	22" x 8" x 8"	40
SI-BHY-208X	Insulated	20"	#8	10	200	22" x 8" x 8"	43
SI-BHY-248X	Insulated	24"	#8	10	200	25" x 8" x 8"	51
SI-BHY-268X	Insulated	26"	#8	10	200	27" x 8" x 8"	55
SI-BHY-308X	Insulated	30"	#8	10	200	31" x 8" x 8"	63
SI-BHY-368X	Insulated	36"	#8	10	200	37" x 8" x 8"	74
SI-BHY-66X	Insulated	6"	#6	10	500	22" x 8" x 8"	33
SI-BHY-86X	Insulated	8"	#6	10	500	22" x 8" x 8"	43
SI-BHY-116X	Insulated	11"	#6	10	200	22" x 8" x 8"	23
SI-BHY-126X	Insulated	12"	#6	10	200	22" x 8" x 8"	26
SI-BHY-156X	Insulated	15"	#6	10	200	22" x 8" x 8"	32
SI-BHY-186X	Insulated	18"	#6	10	200	22" x 8" x 8"	40
SI-BHY-206X	Insulated	20"	#6	10	200	22" x 8" x 8"	43
SI-BHY-246X	Insulated	24"	#6	10	200	25" x 8" x 8"	51
SI-BHY-266X	Insulated	26"	#6	10	200	27" x 8" x 8"	55
SI-BHY-306X	Insulated	30"	#6	10	200	31" x 8" x 8"	63
SI-BHY-366X	Insulated	36"	#6	10	200	37" x 8" x 8"	74

Senior Industries Pole Line Hardware is engineered and manufactured for durability, reliability and ease of installation. Our rigid quality control standards assure you of the highest quality hardware from order to order.

Our Pole Line Hardware conforms to the latest revisions of ASTM and Bellcore specifications. Mechanical plating is per ASTM B695. Hot-dip galvanizing is per ASTM A153.

For technical support, installation information and special requirements please contact our Inside Sales Team at: 1-800-350-1650, or via e-mail at: sales@seniorindustries.com

© 2010 Senior Industries, Inc. All rights reserved. Specifications subject to change without notice.
Some products are non-standard and may be subject to longer lead time delivery and minimum order quantity requirements.

DRIVE HOOK

Bellcore Specification: 7365

Product Number **PID Number:**
SI-3000 400 314 530

- Used for securing drop wire attachments and service drops

- Rolled fether drive threads and pilot point for easy starting
- Constructed of high quality steel, mechanically plated for long service life

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-3000	$\frac{7}{16}$ " x 4 $\frac{3}{4}$ "	200	9" x 9" x 7"	53 Lbs.
SI-3001	$\frac{5}{16}$ " x 3 $\frac{1}{2}$ "	500	11" x 11" x 7 $\frac{1}{2}$ "	58 Lbs.



SUSPENSION CLAMP

Bellcore Specification: 8623

PID Number: 400 762 282

- Designed to securely grip messenger cable
- Clamps accept $\frac{1}{4}$ " (6.6M) to $\frac{5}{16}$ " (16M) messenger strand
- Made from rolled, high quality steel, hot-dip galvanized for maximum corrosion protection
- Furnished with two $\frac{1}{2}$ " track bolts and square nuts
- Mount messenger assembly to pole with a $\frac{5}{8}$ " bolt thru center hole

Part Number	Carton Qty	Carton Size	Carton Weight
SI-1740	25	9" x 9" x 7"	45 Lbs.



Curved Suspension Clamp

Product Number: SI-1750

PID Number: 400 762 274

Part Number	Type	Carton Qty	Carton Size	Carton Weight
SI-1750	Heavy Duty	10	9" x 9" x 7"	36 Lbs.
SI-1755	Economy	25	9" x 9" x 7"	53 Lbs.



GUY HOOK

Bellcore Specification: 7909

Part Number **PID Number**
SI-4425 400 149 910
SI-4426 400 149 928

- Used for down and span guys
- Constructed of ductile iron, hot-dip galvanized
- Features smooth grooves to eliminate chafing of the strand
- Accepts a wide range of strand diameters

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-4425	$\frac{5}{8}$ "	25	12" x 9" x 5"	41 Lbs.
SI-4426	$\frac{3}{4}$ "	25	14" x 10" x 8"	44 Lbs.



THIMBLE EYE NUT

Bellcore Specification: 6228

Part Number	PID Number
SI-4405	400 162 913
SI-4406	400 162 921

- Thimble eye nuts are used in dead end guying
- Constructed of ductile iron, hot-dip galvanized
- Feature smooth grooves to eliminate chafing of the strand

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-4405	5/8"	50	11 1/2" x 9" x 5 1/2"	39 Lbs.
SI-4406	3/4"	50	11 1/2" x 9" x 5 1/2"	44 Lbs.



LASHING SUPPORT STRAP AND SPACER

Lashing Strap

Bellcore Specification: 7169

Product Number	PID Number
SI-7511-16	400 272 985
SI-7511-22	400 272 993
SI-7511-28	400 273 009
SI-7511-34	400 273 017
SI-7511-45	400 273 025
SI-7511-66	400 273 033
SI-7511-78	400 273 041

- Used to strap CATV and telephone cable to steel strand in aerial construction
- Constructed of non-corrosive 304 stainless steel
- Straps are .010" thickness x 3/4" wide and available in lengths from 10" to 78"
- Strap edges are processed to be smooth and free of burrs
- Used with Senior Industries' SI-7512 Spacer




Part Number	Length		Maximum Assembly	Carton Qty	Carton Weight
	Diameter	Circumference			
SI-7511-10	10"	3/4"	2 5/16"	500	14.5 Lbs.
SI-7511-16	16"	1 3/16"	3 5/8"	500	20 Lbs.
SI-7511-22	22"	2"	6 5/16"	300	16 Lbs.
SI-7511-28	28"	2 5/8"	8 5/16"	500	34 Lbs.
SI-7511-34	34"	3 1/8"	10"	200	18 Lbs.
SI-7511-45	45"	4"	12 1/2"	200	21 Lbs.
SI-7511-50	50"	5"	15 3/16"	200	23 Lbs.
SI-7511-66	66"	6 1/2"	20 1/2"	200	29 Lbs.
SI-7511-78	78"	7 1/2"	23"	300	55 Lbs.

Lashing Strap Spacer

High Density Polyethylene, UV Stabilized

Part Number	Height	Carton Qty	Carton Weight
SI-7512-025	0.25"	2000	17 Lbs.
SI-7512-050	0.50"	1600	21 Lbs.
SI-7512-075	0.75"	1200	22 Lbs.
SI-7512-100	1.00"	1000	24 Lbs.
SI-7512-125	1.25"	1000	30 Lbs.
SI-7512-150	1.50"	1000	36 Lbs.
SI-7512-175	1.75"	500	21 Lbs.
SI-7512-200	2.00"	500	24 Lbs.
SI-7512-225	2.25"	500	27 Lbs.
SI-7512-250	2.50"	250	15 Lbs.
SI-7512-275	2.75"	250	17 Lbs.
SI-7512-300	3.00"	250	18 Lbs.
SI-7512-325	3.25"	250	20 Lbs.

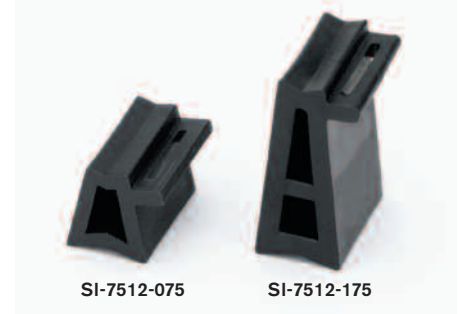

LASHING WIRE

- Used to support CATV and telephone cable to messenger strand in aerial construction
- Made from high strength non-corrosive stainless steel
- Wire is fully annealed and wax coated for ease of use

Part Number	Wire Diameter	Coil Length	SS Type	Coils per Carton	Carton Weight
SI-9603	.045"	1200 ft.	430	6	40 Lbs.
SI-9607	.045"	1200 ft.	316	6	40 Lbs.
SI-9609	.045"	1200 ft.	302	6	40 Lbs.
SI-9610	.038"	1600 ft.	302	6	40 Lbs.



D CABLE LASHING WIRE CLAMP

Bellcore Specification: 7886

PID Number: 400 121 349

- Accepts 1/4" (6.6M) to 3/8" (16M) messenger strand
- Designed for easy and permanent termination of lashing wire to messenger strand
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2175	50	2 1/4" x 2 3/4" x 2 3/4"	7 Lbs.



LASHING WIRE CLAMP

- Accepts 1/4" (6.6M) messenger strand
- Designed for easy and permanent termination of lashing wire to messenger strand
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2176	100	9" x 5 1/2" x 5"	14 Lbs.
SI-2176T	100	14" x 5" x 6"	21 Lbs.



SI-2176



SI-2176T

POLE STEP

Pole Step, Hollow Pole

- For use with steel or composite poles
- All stainless steel design
- Rugged and reliable
- Mounts into a 1 5/8" diameter hole
- Captive design prevents the dropping of loose parts during installation
- Keyed mounting plate provides positive alignment of pole step to pole
- Easy to install
- Patented

Part Number	Type	Pole Diameter	Pole Thickness	Carton Qty	Carton Size	Carton Weight
SI-0040	Standard	10" to 20"	7 gage, 3/8"	20	12" x 12" x 7"	39 Lbs.
SI-0040S	Deeper Plate	6.5" to 10"	.118" to .219"	20	12" x 12" x 7"	41 Lbs.



Removable Pole Step, Hollow Pole

- For use with SI-0048
- Constructed of high quality steel, hot-dip galvanized
- Rugged and reliable
- Easy to install
- Patented

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0047	20	12" x 12" x 7"	15 Lbs.



Removable Pole Step Mounting Assembly

- For use with steel or composite poles
- Stainless steel design
- Rugged and reliable
- Mounts into a 1 1/8" diameter hole
- Plate, nut, and washer are captive on pole step rod and cannot be removed
- Captive design prevents the dropping of loose parts during installation
- Keyed mounting plate provides positive alignment of pole step to pole
- Easy to install
- Patented

Part Number	Type	Pole Diameter	Pole Thickness	Carton Qty	Carton Size	Carton Weight
SI-0048	Standard	10" to 20"	7 gage, 3/8"	20	12" x 12" x 7"	30 Lbs.
SI-0048S	Deeper Plate	10" to 13"	.118" to .219"	20	12" x 12" x 7"	32 Lbs.



Removable Pole Step, Complete

- Combines SI-0047 and SI-0048 or SI-0048S in one package
- For use with steel or composite poles
- Rugged and reliable
- Easy to install
- Patented

Part Number	Type	Pole Diameter	Pole Thickness	Carton Qty	Carton Size	Carton Weight
SI-0041	Standard	10" to 20"	7 gage, 3/8"	20	14" x 14" x 9"	45 Lbs.
SI-0041S	Deeper Plate	10" to 13"	.118" to .219"	20	20" x 8" x 7"	50 Lbs.



Removable Pole Step, Narrow

- Constructed of high quality steel, hot-dip galvanized
- Rugged and reliable
- Easy to install


Part Number	Carton Qty	Carton Size	Carton Weight
SI-0049	20	12" x 12" x 7"	13 Lbs.



Pole Step, Wood Pole

- For use with wood poles
- Constructed of high quality steel, hot-dip galvanized
- Rugged and reliable
- Flat driving surface and fender drive thread for easy and secure installation

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0042	20	10" x 8" x 6"	20 Lbs.

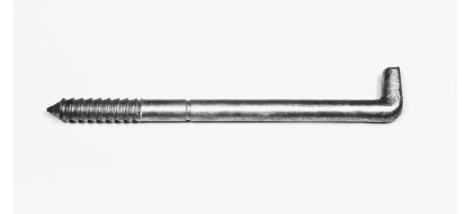

Pole Step, Thru-Bolt

- Constructed of high quality steel, hot-dip galvanized
- Rugged and reliable
- Curved washer to match the contour of the pole the step assembles to

Part Number	Carton Qty	Carton Size	Carton Weight
SI-0037	20	22" x 9" x 6"	46 Lbs.




CABLE GUARD STRAP

Bellcore Specification: 6789

Part Number	PID Number
SI-0075	400 314 092
SI-0076	400 314 761
SI-0077	400 314 779
SI-0078	400 314 787
SI-0079	400 314 795

- Constructed of high quality steel, hot-dip galvanized
- Used in securing U-cable guards to poles

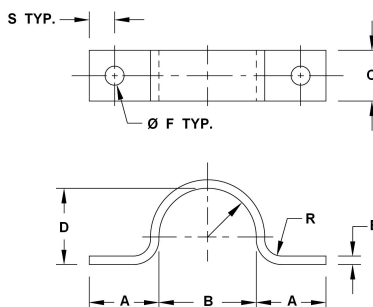

Part Number	Dimensions								Package Qty	Carton Qty	Carton Size	Carton Weight
	(A)	(B)	(C)	(D)	(E)	(F)	(R)	(S)				
SI-0075	1 1/32"	1 1/16"	3/4"	1 1/8"	1/8"	9/32"	1/4"	3/8"	25	450	12" x 12" x 8"	52 Lbs.
SI-0076	1 1/32"	1 1/2"	3/4"	1 1/16"	1/8"	9/32"	3/8"	3/8"	25	300	14" x 10" x 8"	42 Lbs.
SI-0077	1 1/32"	2 3/8"	3/4"	2 5/16"	1/8"	9/32"	3/8"	3/8"	25	150	14" x 14" x 6"	32 Lbs.
SI-0078	1 5/16"	3 3/8"	1"	3 5/16"	3/16"	11/32"	3/8"	1/2"	25	25	8" x 6" x 6"	12 Lbs.
SI-0079	1 5/16"	3 7/8"	1"	3 13/16"	3/16"	11/32"	3/8"	1/2"	25	25	8" x 6" x 6"	19 Lbs.

ALUMINUM DAMPER

PID Number: 040 249 047

- Prevents cable dancing
- Can be used with both lashed and self-supporting aerial cable lines
- Damper comes with 2 D lashing clamps and 2 lashing supports
- Constructed of aluminum

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2302	1	36 1/2" x 11 1/4" x 15"	2 Lbs.



TAP BRACKET

- Provides a means to secure a tap to messenger strand
- Formed from premium-grade aluminum or high quality steel, hot-dip galvanized
- Allows electronic device to be mounted 3" to 9", or 2" to 4" from strand

Part Number	Type	Size	Jaws Strand Range	Carton Qty	Carton Weight
SI-TAP-250	Single	2 1/2"	1/4" to 3/8" dia.	50	11 Lbs.
SI-TAP-900	Adjustable	3 - 9"	1/4" to 3/8" dia.	50	12 Lbs.
SI-TAP-250G	Single	2 1/2"	1/4" to 3/8" dia.	50	11 Lbs.
SI-TAP-250GC	Single	2 1/2"	1/4" to 3/8" dia.	50	11 Lbs.
SI-TAP-900G	Adjustable	3 - 9"	1/4" to 3/8" dia.	50	12.5 Lbs.
SI-TAP-200G	Single	2"	1/4" to 1/8" dia.	50	10 Lbs.
SI-TAP-400G	Single	4"	1/4" to 1/8" dia.	50	18 Lbs.
SI-TAP-200V	Single	2"	1/4" to 1/8" dia.	50	10 Lbs.
SI-TAP-400V	Single	4"	1/4" to 1/8" dia.	50	18 Lbs.

G suffix denotes Galvanized version
GC suffix denotes Ground Clip version



REINFORCING STRAP

- Used in poleline construction as an added support for suspension clamps
- Constructed of high quality steel, mechanically plated

Part Number	Type	Hole Size	Bolt Size	Carton Qty	Carton Size	Carton Weight
SI-0088A	S Type	1 ¹ / ₁₆ "	5 ⁵ / ₁₆ "	100	8 ¹ / ₂ " x 8" x 4"	36 Lbs.
SI-0088B	S Type	3 ³ / ₁₆ "	3 ³ / ₄ "	100	11 ¹ / ₂ " x 11" x 5 ¹ / ₂ "	48 Lbs.



GUY ATTACHMENT

- Used to fasten guys to poles
- Constructed of high quality steel, mechanically plated

Part Number	Carton Qty	Carton Size	Carton Weight
SI-4430	100	10" x 8 ¹ / ₂ " x 6 ³ / ₄ "	63 Lbs.



POLE PLATE 7140

- Used to mark wood poles
- Constructed of aluminum, 0.080" thick

Part Number	Carton Qty	Carton Size	Carton Weight
STD720336	200	7" x 7" x 5"	6 Lbs.



EXTENSION BRACKET

- Constructed of high quality steel, hot-dip galvanized
- Rugged and reliable
- Easy to install
- For use with wood poles
- Mount bracket assembly to pole with a 5⁵/₁₆" bolt thru center top hole

Part Number	Carton Qty	Carton Size	Carton Weight
SI-7034	10	14" x 14" x 8"	48 Lbs.



Extension Bracket/Machine Bolt Assembly

- Combines SI-7034 bracket and SI-1406, 5⁵/₁₆" x 3" machine bolt in a package
- For use with wood poles
- Mount bracket assembly to pole with a 5⁵/₁₆" bolt thru center top hole

Part Number	Carton Qty	Carton Size	Carton Weight
SI-7034MB	10	14" x 14" x 8"	52 Lbs.



CABLE RACK SUPPORT

- Constructed of high strength carbon steel, hot-dip galvanized

Part Number	Carton Qty	Carton Size	Carton Weight
SI-2357	25	14" x 14" x 13"	62 Lbs.



DRIVE SCREW

Bellcore Specification: 6281

Part Number	PID Number	Part Number	PID Number
SI-0029	400 262 143	SI-0032	400 262 176
SI-0030	400 262 150	SI-0033	400 262 184
SI-6228	400 262 188		
SI-0031	400 262 168		
SI-0034	400 262 192		

- Constructed of high quality steel, hot-dip galvanized



Part Number	Type	Size	Carton Qty	Carton Size	Carton Weight
SI-0029	Fetter Drive, Regular Pt.	¼" x 2½"	2500	16" x 11" x 8"	88 Lbs.
SI-0030	Fetter Drive, Regular Pt.	⅝" x 3"	800	14" x 10" x 8"	52 Lbs.
SI-6229	Fetter Drive, Regular Pt.	⅜" x 3"	600	10¼" x 10¼" x 8"	53 Lbs.
SI-6228	Fetter Drive, Regular Pt.	⅜" x 4"	500	11" x 10" x 8"	64 Lbs.
SI-6238	Fetter Drive, Regular Pt.	½" x 4"	250	11" x 11" x 8"	57 Lbs.
SI-6226	Fetter Drive, Drive Pt.	⅜" x 3"	500	10" x 10" x 8"	44 Lbs.
SI-0031	Fetter Drive, Drive Pt.	⅜" x 4"	400	9" x 9" x 6½"	48 Lbs.
SI-0034	Fetter Drive, Drive Pt.	⅝" x 6"	100	11" x 10" x 8"	60 Lbs.
SI-0036	Fetter Drive, Drive Pt.	½" x 4"	200	11" x 10" x 8"	42 Lbs.
SI-6241	Fetter Drive, Drive Pt.	½" x 4½"	200	10" x 10" x 8"	47 Lbs.
SI-0032	Twist Drive, Drive Pt.	½" x 4½"	200	11" x 10" x 8"	48 Lbs.
SI-0033	Twist Drive, Drive Pt.	½" x 6½"	100	11" x 10" x 8"	33 Lbs.

LAG SCREW

Bellcore Specification: 6337

Part Number	PID Number
SI-6203	400 262 093
SI-0058	900 241 605

- Constructed of high quality steel, hot-dip galvanized
- Provided with a gimlet point
- Additional sizes available upon request

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-6203	¼" x 2"	2000	16" x 8" x 6"	52 Lbs.
SI-6035	⅝" x 1½"	500	12" x 10" x 8"	27 Lbs.
SI-6037	⅝" x 2½"	500	12" x 10" x 8"	24 Lbs.
SI-0039	⅝" x 3"	1100	14" x 10" x 8"	74 Lbs.
SI-0059	⅜" x 1½"	1000	16" x 12" x 8"	70 Lbs.
SI-0058	⅜" x 1¾"	1000	16" x 12" x 8"	75 Lbs.
SI-6237	½" x 2"	250	12" x 10" x 8"	28 Lbs.
SI-6204	¼" x 2½"	2000	10" x 8½" x 5½"	33 Lbs.

- Constructed of grade 5 steel, dacromet finish
- Additional sizes available upon request

Part Number	Size	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-6039	⅝" x 1½"	100	1000	10½" x 8¾" x 7¾"	40 Lbs.
SI-6040	⅝" x 2"	100	600	11¼" x 11¼" x 4¼"	25 Lbs.
SI-6041	⅝" x 3"	100	600	11¼" x 11¼" x 4¼"	34 Lbs.

- Constructed of high quality mild steel, zinc plated
- Additional sizes available upon request

Part Number	Size	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-6039A	⅝" x 1½"	100	1000	10½" x 8¾" x 7¾"	40 Lbs.
SI-6040A	⅝" x 2"	100	600	11¼" x 11¼" x 4¼"	25 Lbs.
SI-6041A	⅝" x 3"	100	600	11¼" x 11¼" x 4¼"	34 Lbs.

LAG SCREW WITH RUBBER WASHER

- Constructed of high quality carbon steel, zinc plated
- Rubber washer provides seal for moisture protection

Part Number	Size	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-6038	¼" x 2"	100	600	11¼" x 11¼" x 4¼"	25 Lbs.



LAG SHIELD

- Constructed of rustproof zinc alloy
- Consists of 2 alloy sleeves held together by interlocking tabs
- Used for hard masonry
- Tapered rings provide additional holding power in softer base materials
- Internal threads to mate with lag screw threads for attaching cable clamps, terminals, lock boxes to concrete, hollow block and brick


Part Number	Size	Hole Size	Length	Carton Qty	Carton Size	Carton Weight
SI-LS-14	1/4" Short	1/2"	1"	1000	13" x 9" x 5"	22 Lb.
SI-LS-516	5/8" Long	1/2"	1 3/4"	100	6" x 4" x 4"	3 Lb.



MASONRY SCREW

- Constructed of hardened steel, blue climaseal finish
- Accommodates a 3/16" anchor diameter
- Excellent for wood or concrete
- No need to pre-spot holes
- Can be removed and reinstalled
- Additional sizes available upon request

Part Number	Anchor Diameter	Thread Length	Hex Head Size	Carton Qty	Carton Size	Carton Weight
SI-6042	3/16"	1 3/4"	1/4"	100	3" x 3" x 4"	1 Lb.

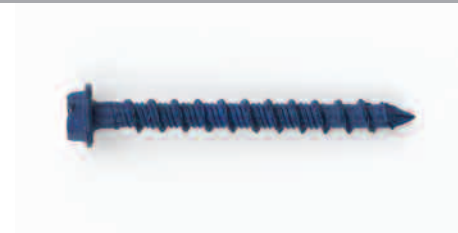

HEX HEAD CAP SCREW

- For use with Grade 2 Nuts
- 500 hours salt fog spray resistant per ASTM B117
- Right-hand thread direction, Class 2A
- Additional sizes available upon request
- Fully threaded, Grade 2 Zinc-Chromate Steel

Part Number	Thread Size	Thread Length	Hex Width	Head Height	Carton Qty	Carton Size	Carton Weight
SI-6043	1/4 - 20	5/8"	7/16"	5/32"	100	3" x 3" x 4"	1.5 Lb.



DRYWALL SCREW

- For attaching drywall to wood studs
- No predrilling needed
- Constructed of high quality steel, black phosphate finish
- #2 driver size
- Standard, phillips drive, countersunk bugle head, sharp point
- Additional sizes available upon request

Part Number	Size	Length	Thread Type	Head Diameter	Carton Qty	Carton Size	Carton Weight
SI-6044	#6	1 1/4"	Coarse	.315"	100	3" x 3" x 4"	.5 Lb.



CROSSOVER CLAMP


- Used to clamp intersecting 1/4" strand runs
- Positive clamping action prevents slippage and abrasion
- Constructed of high quality steel, mechanically plated components

Part Number	Carton Qty	Carton Size	Carton Weight
SI-1756	50	9" x 7" x 6"	34 Lbs.



DOUBLE ARMING BOLT

Part Number	Bellcore Specification	PID Number
SI-0910	6645	400 013 777
SI-0912	6645	400 013 785
SI-0914	6645	400 013 793
SI-0916	6645	400 013 801
SI-0918	6645	400 013 819
SI-0920	6645	400 013 827
SI-0922	6645	400 013 835
SI-1014	6645B	400 013 868
SI-1016	6645B	400 013 876
SI-1018	6645B	400 013 884
SI-1020	6645B	400 013 892

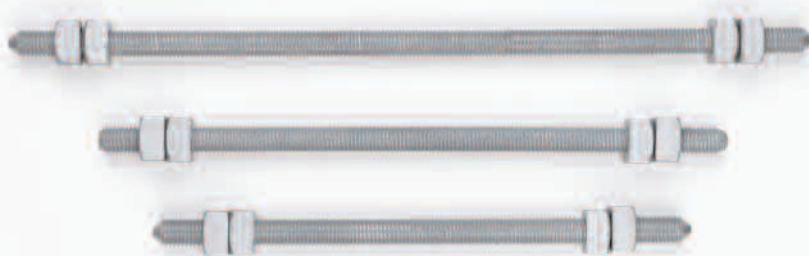

- Constructed of high quality steel, hot-dip galvanized
- Cone points permit easy driving without damage to threads
- Bolts are supplied with four square nuts assembled
- Additional sizes available upon request

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0910	5/8" x 10"	50	11" x 11" x 5"	65 Lbs.
SI-0912	5/8" x 12"	40	13" x 11" x 5"	68 Lbs.
SI-0914	5/8" x 14"	30	15" x 7" x 7"	46 Lbs.
SI-0916	5/8" x 16"	25	17" x 7" x 7"	40 Lbs.
SI-0918	5/8" x 18"	25	19" x 7" x 7"	43 Lbs.
SI-0920	5/8" x 20"	25	21" x 7" x 7"	47 Lbs.
SI-0922	5/8" x 22"	25	23" x 7" x 7"	56 Lbs.
SI-0924	5/8" x 24"	25	25" x 7" x 7"	58 Lbs.
SI-0926	5/8" x 26"	25	27" x 7" x 7"	66 Lbs.
SI-0928	5/8" x 28"	25	29" x 7" x 7"	70 Lbs.
SI-0930	5/8" x 30"	25	31" x 7" x 7"	74 Lbs.

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0932	5/8" x 32"	25	33" x 7" x 7"	78 Lbs.
SI-1012	3/4" x 12"	25	13" x 9" x 9"	49 Lbs.
SI-1014	3/4" x 14"	25	15" x 9" x 9"	52 Lbs.
SI-1016	3/4" x 16"	20	17" x 9" x 9"	49 Lbs.
SI-1018	3/4" x 18"	20	19" x 9" x 9"	54 Lbs.
SI-1020	3/4" x 20"	20	21" x 9" x 9"	56 Lbs.
SI-1022	3/4" x 22"	20	23" x 9" x 9"	61 Lbs.
SI-1024	3/4" x 24"	20	25" x 9" x 9"	65 Lbs.
SI-1026	3/4" x 26"	20	27" x 9" x 9"	70 Lbs.
SI-1028	3/4" x 28"	20	29" x 9" x 9"	75 Lbs.
SI-1030	3/4" x 30"	20	31" x 9" x 9"	78 Lbs.

CARRIAGE BOLT

Bellcore Specification: 7096

Part Number	PID Number
SI-0557	400 012 514
SI-0558	400 012 522
SI-0566	400 012 530
SI-0568	400 012 548
SI-0570	400 012 555
SI-0572	400 012 563
SI-0574	400 012 571
SI-0057	400 012 589
SI-0626	400 012 597

- Constructed of high quality steel, hot-dip galvanized
- Square shoulder prevents turning of the bolt when tightening
- Supplied with one square nut assembled
- Additional sizes available upon request




Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0050	3/16" x 1"	1000	16" x 12" x 8"	42 Lbs.
SI-0051	3/16" x 1 1/4"	1000	16" x 12" x 8"	52 Lbs.
SI-0052	1/4" x 1 1/2"	1000	16" x 12" x 8"	62 Lbs.
SI-0053	1/4" x 2"	500	12" x 10" x 8"	36 Lbs.
SI-0054	1/4" x 2 1/4"	500	12" x 10" x 8"	41 Lbs.
SI-0055	1/4" x 2 1/2"	500	12" x 10" x 8"	46 Lbs.
SI-0555	3/8" x 2 1/2"	100	9" x 9" x 3"	50 Lbs.
SI-0556	3/8" x 3"	100	10" x 9" x 3"	60 Lbs.
SI-0557	3/8" x 4"	100	9" x 9" x 3"	48 Lbs.
SI-0558	3/8" x 4 1/2"	100	16" x 9" x 3"	43 Lbs.
SI-0560	3/8" x 5"	100	11" x 9" x 3"	45 Lbs.
SI-0565	3/8" x 5 1/2"	250	12" x 9" x 3"	50 Lbs.
SI-0566	3/8" x 6"	100	13" x 9" x 3"	55 Lbs.

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0567	3/8" x 7"	100	15" x 9" x 3"	60 Lbs.
SI-0568	3/8" x 8"	100	17" x 9" x 3"	25 Lbs.
SI-0570	3/8" x 10"	150	21" x 9" x 3"	48 Lbs.
SI-0572	3/8" x 12"	150	13" x 9" x 3"	57 Lbs.
SI-0574	3/8" x 14"	100	15" x 9" x 3"	44 Lbs.
SI-0623	1/2" x 4 1/2"	200	10" x 9" x 4"	64 Lbs.
SI-0057	1/2" x 4 3/4"	150	11" x 9" x 4"	50 Lbs.
SI-0624	1/2" x 5"	150	11" x 9" x 4"	53 Lbs.
SI-0625	1/2" x 5 1/2"	150	12" x 9" x 4"	57 Lbs.
SI-0626	1/2" x 6"	100	13" x 9" x 4"	40 Lbs.
SI-0627	1/2" x 7"	100	15" x 9" x 4"	45 Lbs.
SI-0628	1/2" x 8"	100	17" x 9" x 4"	50 Lbs.
SI-0636	5/8" x 6"	100	17" x 9" x 4"	38 Lbs.

MACHINE BOLT

- Constructed of high quality steel, hot-dip galvanized
- Cone points permit easy driving without damage to threads
- Bolts are supplied with one square nut assembled
- Additional sizes available upon request
- Add "-1" to part number to order bolts with 2 square nuts assembled

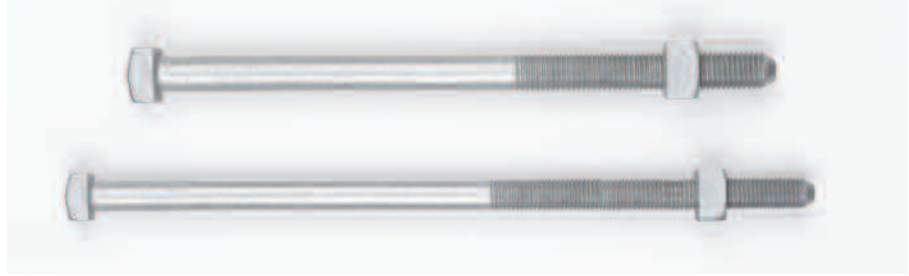

Square Head Machine Bolt, 3/8"

Bellcore Specification: 6207

Part Number	PID Number	Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-1203		SI-1203	3/8" x 1 1/2"	100	6" x 4" x 4"	10 Lbs.
SI-1206	400 013 439	SI-1204	3/8" x 2"	100	6" x 4" x 4"	11 Lbs.
SI-1210	400 013 447	SI-1206	3/8" x 3"	400	11" x 9" x 3"	52 Lbs.
SI-1212	400 013 520	SI-1208	3/8" x 4"	250	9" x 9" x 3"	38 Lbs.
		SI-1209	3/8" x 4 1/2"	250	10" x 9" x 3"	43 Lbs.
		SI-1210	3/8" x 5"	250	11" x 9" x 3"	50 Lbs.
		SI-1211	3/8" x 5 1/2"	250	12" x 9" x 3"	53 Lbs.
		SI-1212	3/8" x 6"	250	13" x 9" x 3"	65 Lbs.
		SI-1214	3/8" x 8"	200	17" x 9" x 3"	58 Lbs.
		SI-1216	3/8" x 10"	150	21" x 9" x 3"	53 Lbs.

Square Head Machine Bolt, 1/2"

Bellcore Specification: 6207

Part Number	PID Number	Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-0043		SI-0043	1/2" x 1 1/4"	250	11" x 10" x 4"	40 Lbs.
SI-0043	400 013 462	SI-0044	1/2" x 1 1/2"	200	11" x 10" x 4"	35 Lbs.
SI-0045	400 013 470	SI-0045	1/2" x 1 3/4"	250	11" x 10" x 4"	48 Lbs.
SI-0046	400 013 496	SI-1304	1/2" x 2"	250	11" x 11" x 4"	50 Lbs.
SI-1316	400 013 504	SI-1305	1/2" x 2 1/2"	250	11" x 11" x 4"	60 Lbs.
		SI-1306	1/2" x 3"	200	16" x 8" x 4"	50 Lbs.
		SI-1308	1/2" x 4"	200	21" x 9" x 4"	60 Lbs.
		SI-0046	1/2" x 4 1/2"	150	15" x 9" x 4"	46 Lbs.
		SI-1315	1/2" x 5"	150	16" x 9" x 4"	40 Lbs.
		SI-1316	1/2" x 6"	120	13" x 9" x 4"	45 Lbs.
		SI-1317	1/2" x 7"	100	15" x 9" x 4"	53 Lbs.
		SI-1318	1/2" x 8"	100	17" x 9" x 4"	57 Lbs.
		SI-1319	1/2" x 9"	100	10" x 9" x 4"	62 Lbs.
		SI-1320	1/2" x 10"	100	11" x 9" x 4"	69 Lbs.
		SI-1322	1/2" x 12"	100	13" x 9" x 4"	79 Lbs.
		SI-1324	1/2" x 14"	100	15" x 9" x 4"	85 Lbs.
		SI-1326	1/2" x 16"	100	17" x 9" x 4"	90 Lbs.

Square Head Machine Bolt, 5/8"

Bellcore Specification: 6207

Part Number	PID Number	Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-1412	400 013 520	SI-1410	5/8" x 5"	150	11" x 11" x 5"	87 Lbs.
SI-1414	400 013 470	SI-1412	5/8" x 6"	120	13" x 11" x 5"	80 Lbs.
SI-1416	400 013 645	SI-1414	5/8" x 7"	100	15" x 11" x 5"	75 Lbs.
SI-1420	400 013 652	SI-1416	5/8" x 8"	100	17" x 11" x 5"	41 Lbs.
SI-1422	400 013 660	SI-1418	5/8" x 9"	50	10" x 11" x 5"	47 Lbs.
SI-1424	400 013 678	SI-1420	5/8" x 10"	50	11" x 11" x 5"	45 Lbs.
SI-1426	400 013 686	SI-1422	5/8" x 12"	50	15" x 11" x 5"	53 Lbs.
SI-1428	400 013 694	SI-1424	5/8" x 14"	50	15" x 11" x 5"	59 Lbs.
SI-1430	400 013 702	SI-1426	5/8" x 16"	50	17" x 11" x 5"	65 Lbs.
SI-1432	400 013 710	SI-1428	5/8" x 18"	50	19" x 11" x 5"	80 Lbs.
SI-1434	400 314 274	SI-1430	5/8" x 20"	50	21" x 11" x 5"	95 Lbs.
		SI-1432	5/8" x 22"	25	23" x 6" x 5"	47 Lbs.
		SI-1434	5/8" x 24"	25	25" x 6" x 5"	53 Lbs.
		SI-1436	5/8" x 26"	25	27" x 6" x 5"	51 Lbs.
		SI-1438	5/8" x 28"	25	29" x 6" x 5"	61 Lbs.

Square Head Machine Bolt, 3/4"

Bellcore Specification: 6207

Part Number	PID Number	Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-1510	400 013 728	SI-1508	3/4" x 8"	50	9" x 11" x 6"	60 Lbs.
SI-1512	400 013 736	SI-1510	3/4" x 10"	50	11" x 11" x 6"	73 Lbs.
SI-1514	400 013 744	SI-1512	3/4" x 12"	25	13" x 11" x 6"	40 Lbs.
SI-1516	400 013 751	SI-1514	3/4" x 14"	25	15" x 11" x 6"	45 Lbs.
SI-1518	400 013 769	SI-1516	3/4" x 16"	25	17" x 6" x 6"	50 Lbs.
		SI-1518	3/4" x 18"	25	19" x 6" x 6"	60 Lbs.
		SI-1520	3/4" x 20"	25	21" x 6" x 6"	65 Lbs.
		SI-1522	3/4" x 22"	25	23" x 6" x 6"	71 Lbs.
		SI-1524	3/4" x 24"	25	25" x 6" x 6"	75 Lbs.
		SI-1526	3/4" x 26"	25	27" x 6" x 6"	80 Lbs.

SQUARE NUT

Bellcore Specification: 6445

- Used with many products such as machine, carriage or double arming bolts
- Constructed of high quality steel, hot-dip galvanized

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-5362	5/16"-18	500	6" x 4" x 4"	8 Lbs.
SI-5363	3/8"-16	500	6" x 4" x 4"	12 Lbs.
SI-5364	1/2"-13	500	7" x 7" x 5"	27 Lbs.
SI-5365	5/8"-11	250	7" x 7" x 5"	26 Lbs.
SI-5366	3/4"-10	250	8" x 6" x 6"	26 Lbs.



HEX LOCKNUT, NYLON INSERT

- Also known as elastic locknut
- Right-hand thread
- Resistant to vibration
- Nylon insert operating temperature up to 250° F
- Standard Hex - Grade 2 zinc-plated steel

Part Number	Thread Size	Hex Width	Nut Height	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-5357	1/4"-20	7/16"	5/16"	200	2000	16" x 8" x 6"	17 Lbs.



SERRATED FLANGE LOCKNUT

- For use with Grade 2 bolts and screws
- Ridges formed on the mating face of flange to lock into the workpiece surface and prevent nut from turning
- Full thread surface contact for large load-bearing strength, vibration and impact resistance
- Grade 2 Zinc-plated steel

Part Number	Thread Size	Hex Width	Nut Height	Flange Diameter	Flange Thickness	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-5358	1/4"-20	7/16"	15/64"	37/64"	.040"	200	3000	9" x 9" x 6"	28 Lbs.



LOCK WASHER

Spring Lock Washer

- Designed to ensure a tight fit by keeping the bolt and nut assembly in tension
- Constructed of high quality steel, zinc plated

Part Number	Size Section	For Bolt Diameter	Carton Qty	Carton Size	Carton Weight
SI-900	.141" x .094"	3/8"	5000	10" x 6" x 6"	40 Lbs.
SI-901	.171" x .125"	1/2"	2500	10" x 6" x 6"	40 Lbs.
SI-921	.203" x .156"	5/8"	2500	10" x 6" x 6"	68 Lbs.
SI-903	.234" x .188"	3/4"	1000	10" x 6" x 6"	46 Lbs.



Double Coil Lock Washer

- Spring temper carbon steel, plated with a special galvanizing process for maximum corrosion protection
- Beveled ends ensure part sits flat in its application

Part Number	Size	Package Qty	Package Weight
SI-911	1/2"	250	12.5 Lbs.
SI-912	5/8"	250	28.0 Lbs.
SI-913	3/4"	250	32.0 Lbs.

Deflection vs. Recovery Pressure

Senior Part Number	Travel Deflection		
Pressure Range	0-750 Lbs.	750-1200 Lbs.	1200-2000 Lbs.
SI-911	0.093"	0.035"	0.002"
SI-912	0.110"	0.057"	0.016"
SI-913	0.014"	0.057"	0.012"



NAIL

Part Number	PID Number	
SI-3100	400 162 244	
SI-3101	400 162 251	

- Constructed of high quality steel, galvanized

Part Number	Size	Carton Qty	Carton Size	Carton Weight
SI-3100	3D x 1 1/4"	25000	10" x 10" x 7"	50 Lbs.
SI-3101	4D x 1 1/2"	14600	10" x 10" x 7"	50 Lbs.
SI-3102	6D x 2"	8400	10" x 10" x 7"	50 Lbs.
SI-3103	8D x 2 1/2"	4550	10" x 10" x 7"	50 Lbs.
SI-3104	10D x 3"	3400	10" x 10" x 7"	50 Lbs.
SI-3113	16D x 3 1/2"	2250	10" x 10" x 7"	50 Lbs.
SI-3105	20D x 4"	1500	10" x 10" x 7"	50 Lbs.
SI-3106	30D x 4 1/2"	1250	10" x 10" x 7"	50 Lbs.
SI-3107	40D x 5"	900	10" x 10" x 7"	50 Lbs.
SI-3108	50D x 5 1/2"	700	10" x 10" x 7"	50 Lbs.
SI-3109	60D x 6"	550	10" x 10" x 7"	50 Lbs.



WASHER

- Constructed of high quality steel, hot-dip galvanized
- Additional sizes available upon request

Square Curved Washer

Bellcore Specification: 6150

Part Number	Dimensions.....				Carton Qty	Carton Size	Carton Weight
	Width	Length	Thickness	Hole			
SI-9000	2¼"	2¼"	⅜"	1⅛"	250	9" x 9" x 6½"	57 Lbs.
SI-9004	3"	3"	¼"	1⅛"	100	9" x 9" x 6½"	57 Lbs.
SI-9010	3½"	3½"	⅜"	7⁄8"	40	9" x 9" x 6½"	53 Lbs.



Round Washer

Bellcore Specification: 6150

Part Number	PID Number
SI-9024	400 285 144
SI-9061	400 285 151
SI-9063	400 285 169

Part Number	Hole Diameter	Outside Diameter	Box Qty	Carton Qty	Carton Size	Carton Weight
SI-9023	⅜"	9⁄16"	100	100	2" x 2" x 2"	6 Lbs.
SI-9024	¼"	¾"	100	6400	12" x 9" x 5"	40 Lbs.
SI-9061	⅜"	1"	100	5000	14" x 10" x 8"	40 Lbs.
SI-9063	½"	1⅜"	200	200	6" x 4" x 4"	8 Lbs.
SI-9064	5⁄8"	1¾"	200	200	6" x 4" x 4"	9 Lbs.
SI-9065	¾"	2"	100	100	4" x 4" x 4"	11 Lbs.




Square Flat Washer

Bellcore Specification: 6150

Part Number	PID Number
SI-9104	400 285 698

Part Number	Dimensions.....				Carton Qty	Carton Size	Carton Weight
	Width	Length	Thickness	Hole			
SI-9105	1.89"	1.89"	1⁄8"	¾"	250	9" x 9" x 6½"	65 Lbs.
SI-9102	2"	2"	1⁄8"	1⅛"	100	5" x 4½" x 3"	12 Lbs.
SI-9103	2¼"	2¼"	⅜"	1⅛"	250	9" x 9" x 6½"	65 Lbs.
SI-9104	2¼"	2¼"	⅜"	1⅜"	250	9" x 9" x 6½"	63 Lbs.
SI-9106	3"	3"	⅜"	1⅜"	250	9" x 9" x 6½"	67 Lbs.

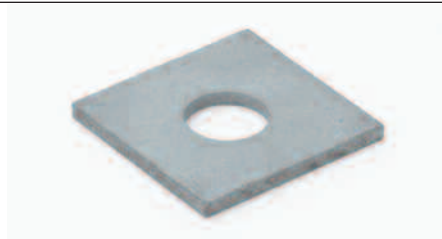

STAPLE

Staple, Ground Wire, Cut Point

- Used to fasten ground wire and ground wire molding to structures
- Constructed from high quality steel and coated as required
- SI-101 and SI-110 are REA accepted

Part Number	Finish	Dimensions.....		Standard Package Qty	Approximate Weight Per 100 Staples
		Length x Inside Width x Wire Diameter			
SI-100	Copper Coated	1⅜" x ½" x .162"		2500	2 Lbs.
SI-101	Copper Coated	1½" x ⅜" x .162"		2500	2 Lbs.
SI-102	Copper Coated	2" x ¼" x .162"		2500	2 Lbs.
SI-103	Copper Coated	1¼" x ⅜" x .114"		2500	1 Lb.
SI-104	Copper Coated	2" x ½" x .162"		2500	2 Lbs.
SI-110	Hot Dip Galvanized	1½" x ¼" x .148"		2500	2 Lbs.
SI-121	Electro-Zinc	1¾" x ⅜" x .148"		3300	2 Lbs.
SI-122	Electro-Zinc	2" x ½" x .162"		2300	2 Lbs.
SI-123	Electro-Zinc	2¼" x ⅜" x ⅜"		1200	4 Lbs.



Staple, Ground Wire Molding, Cut Point

- Used to fasten ground wire and ground wire molding to structures
- Constructed from high quality steel and coated as required
- SI-150 and SI-151 are ANSI Standard

Part Number	Finish	Dimensions	Standard Package Qty	Approximate Weight Per 100 Staples
		Length x Inside Width x Wire Diameter		
SI-150	Hot Dip Galvanized	2" x 1 1/16" x 3/16"	100	4 Lbs.
SI-151	Hot Dip Galvanized	3" x 1 1/16" x 1/4"	100	8 Lbs.
SI-152	Hot Dip Galvanized	3" x 1 1/2" x 1/4"	50	8 Lbs.
SI-153	Hot Dip Galvanized	3 1/2" x 1 3/4" x 1/4"	50	8 Lbs.



Staple, Ground Wire Molding, Diamond Point

- Used to fasten ground wire and ground wire molding to structures
- Constructed from high quality steel and coated as required
- SI-182 is REA accepted

Part Number	Finish	Dimensions.....	Standard Package Qty	Approximate Weight Per 100 Staples
		Length x Inside Width x Wire Diameter		
For 1/2 Inch				
SI-170	Hot Dip Galvanized	2" x 5/8" x .162"	100	2 Lbs.
SI-171	Electro-Zinc	2" x 5/8" x .162"	100	3 Lbs.
SI-172	Electro-Zinc	2" x 5/8" x .187"	100	3 Lbs.
SI-173	Copper Coated	2" x 5/8" x .162"	100	3 Lbs.
For 1 Inch				
SI-180	Hot Dip Galvanized	3" x 1 1/16" x 1/4"	100	8 Lbs.
SI-181	Electro-Zinc	3" x 1 1/16" x 1/4"	100	8 Lbs.
SI-182	Copper Coated	3" x 1 1/16" x 1/4"	100	8 Lbs.



Staple, Ground Wire, Diamond Point

- Used to fasten ground wire and ground wire molding to structures
- Constructed from high quality steel and coated as required

Part Number	Finish	Dimensions	Standard Package Qty	Approximate Weight Per 100 Staples
		Length x Inside Width x Wire Diameter		
SI-200	Copper Coated	1" x 1/4" x .114"	500	1 Lb.
SI-201	Copper Coated	1 1/4" x 1/4" x .114"	500	1 Lb.
SI-202	Copper Coated	1 1/2" x 5/16" x .144"	500	1 Lb.
SI-203	Copper Coated	1 3/4" x 3/8" x .144"	500	2 Lbs.
SI-204	Copper Coated	2" x 1/2" x .162"	100	2 Lbs.
SI-205	Copper Coated	3" x 3/4" x 1/4"	100	8 Lbs.
SI-206	Copper Coated	3" x 1 1/2" x 1/4"	100	8 Lbs.
SI-210	Electro-Zinc	1 1/2" x 1/4" x .120"	100	1 Lb.
SI-211	Electro-Zinc	1 1/2" x 3/8" x .148"	100	1 Lb.
SI-212	Electro-Zinc	1 3/4" x 3/8" x .148"	100	2 Lbs.
SI-213	Electro-Zinc	2" x 1/2" x .162"	100	2 Lbs.
SI-214	Electro-Zinc	2 1/4" x 25/32" x 3/16"	100	4 Lbs.
SI-215	Electro-Zinc	2 1/2" x 29/32" x 3/16"	100	4 Lbs.
SI-216	Electro-Zinc	3" x 3/4" x 1/4"	100	7 Lbs.
SI-141	Hot Dip Galvanized	1 1/2" x 3/8" x .148"	100	2 Lbs.
SI-142	Hot Dip Galvanized	1 3/4" x 3/8" x .148"	100	2 Lbs.
SI-143	Hot Dip Galvanized	2" x 1/2" x .162"	100	2 Lbs.



Senior Industries Datacom Products are engineered and manufactured to provide efficient and reliable installation of wiring and communications networks. Our rigid quality control standards assure you of the highest quality parts from order to order. Mechanical plating is per ASTM B695. Hot-dip galvanizing is per ASTM A153.


For technical support, installation information and special requirements please contact our Inside Sales Team at: 1-800-350-1650, or via e-mail at: sales@seniorindustries.com

© 2010 Senior Industries, Inc. All rights reserved. Specifications subject to change without notice.

Some products are non-standard and may be subject to longer lead time delivery and minimum order quantity requirements.

DISTRIBUTION RING

- Used to provide support for wires in building cable terminals and distribution closets
- Constructed of die cast aluminum



Part Number	Diameter.....				Box Qty	Carton Qty	Carton Size	Carton Weight
	(A)	(B)	(C)	(D)				
SI-4753	4.88"	1.87"	3.13"	2.74"	25	500	20" x 17" x 11"	60 Lbs.
SI-4754	6.12"	3.11"	4.39"	3.74"	25	250	23" x 14" x 11"	40 Lbs.
SI-4755	8.12"	5.12"	6.38"	3.74"	25	250	23" x 18" x 11"	50 Lbs.
SI-4753-M	2.44"	.94"	1.57"	2.74"	50	1000	20" x 17" x 11"	60 Lbs.
SI-4754-M	3.06"	1.56"	2.20"	3.74"	50	500	23" x 14" x 11"	40 Lbs.
SI-4755-M	4.06"	2.56"	3.19"	3.74"	50	500	23" x 18" x 11"	50 Lbs.

WALL PLATE

- Single hole wall plate
- Fits standard electrical outlets
- Durable, heavy-duty plastic, ivory color
- Other sizes and configurations available on request


Part Number	Carton Qty	Carton Size	Carton Weight
SI-WP-100	50	5" x 3" x 2"	1 Lb.



BRIDLE RING

Part Number	Bellcore Specification	PID Number
SI-0061	7912	400 260 378
SI-0062	7912	400 260 394
SI-6651	7912	400 260 394
SI-6653	7912	400 260 386
SI-6666	8518	400 497 202
SI-6667	8518	400 497 186

- Used to secure drop wire to wood, masonry or metal surfaces
- Constructed of high quality steel, mechanically plated
- A and C bridle rings have wood screw threads
- B, K, M and R bridle rings have machine screw threads

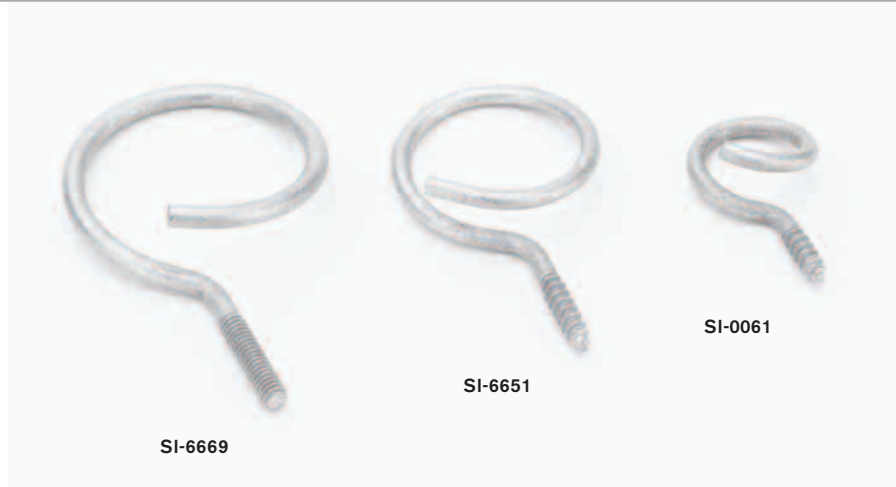

Part Number	Style	Eye Dia.	Thread Size	Package Qty	Carton Qty	Carton Size	Carton Weight
SI-0060	B	5/8"	10/24	25	1000	12" x 12" x 8"	28 Lbs.
SI-0061	C	7/8"	10	30	750	12" x 12" x 8"	30 Lbs.
SI-0062	C	1 5/8"	14	25	300	12" x 12" x 8"	40 Lbs.
SI-0063	C	3"	18	25	100	12" x 12" x 8"	32 Lbs.
SI-6651	A	1 5/8"	16	25	600	12" x 12" x 8"	40 Lbs.
SI-6653	C	1 1/4"	14	25	500	12" x 12" x 8"	35 Lbs.
SI-6666	K	3/4"	10/24	25	1200	12" x 12" x 8"	45 Lbs.
SI-6667	M	1 1/4"	10/24	25	750	12" x 12" x 8"	41 Lbs.
SI-6669	R	1 5/8"	1 1/2"	25	525	12" x 12" x 8"	44 Lbs.

BASEBOARD CLIP

- Used to secure coaxial or twisted pair cable to baseboard
- Steel construction, enamel coated
- Patent pending
- Add suffix to part number to denote color: N = Neutral, W = White, B = Black

Part Number	Cable Size	Carton Qty	Carton Size	Carton Weight
SI-0991	RG 6	1000	6" x 4" x 4"	4 Lbs.
SI-0992	RG 6 Quad	1000	6" x 4" x 4"	4 Lbs.
SI-0993	Telephone	1000	6" x 4" x 4"	4 Lbs.
SI-0994	Category 5	1000	6" x 4" x 4"	4 Lbs.




DRIVE RING

Bellcore Specification: 6835

Part Number	PID Number
SI-6861	400 260 584
SI-6862	400 260 592
SI-6863	401 024 609
SI-6864	400 260 626

- Used for temporary or permanent support of drop wires
- Constructed of high quality steel, hot-dip galvanized for durability

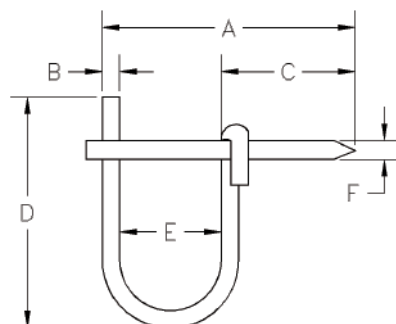

Part Number	Eye Diameter	Dimensions						Package Qty	Carton Qty	Carton Size	Carton Weight
		(A)	(B)	(C)	(D)	(E)	(F)				
SI-6861	1/2"	2 1/16"	.125"	1 3/8"	3/4"	1/2"	.120"	50	500	16" x 8" x 6"	23 Lbs.
SI-6862	5/8"	2 1/4"	.135"	1 1/2"	1 1/8"	5/8"	.165"	50	500	16" x 8" x 6"	25 Lbs.
SI-6863	3/4"	2 5/16"	.177"	1 7/8"	2 1/16"	3/4"	.165"	25	200	16" x 8" x 6"	11 Lbs.
SI-6864	1 1/4"	2 15/16"	.192"	1 3/4"	2 3/4"	1 1/4"	.203"	25	250	16" x 8" x 6"	45 Lbs.

Senior Industries Tools are engineered and manufactured for durability, reliability and for ease of use under the most demanding installation conditions. Our rigid quality control standards assure you of the highest quality tools from order to order.

For technical support, installation information and special requirements please contact our Inside Sales Team at: 1-800-350-1650, or via e-mail at: sales@seniorindustries.com

© 2010 Senior Industries, Inc. All rights reserved. Specifications subject to change without notice.

Some products are non-standard and may be subject to longer lead time delivery and minimum order quantity requirements.

TERMINAL WRENCH

- Used to install drop hardware
- $\frac{3}{8}$ " and $\frac{1}{2}$ " sockets
- 22 AWG wire cutter and stripper built into handle

Part Number	Package Qty	Weight
SI-7195	1	.3 Lbs.



HANDI-REEL

- Super easy reel installation
- Makes one-man installations easier
- Lightweight aluminum frame
- Locks in open position
- Safety latch prevents spindle from detaching when inverted
- Anti-skid pads
- Designed to support 1 or 2 man carry
- Sturdy enough for outdoor installations
- Patented



Part Number	Type	Max Reel Diameter	Max Reel Width	Spindle Diameter	Carton Qty	Carton Size	Carton Weight
SI-1500	Handi-Reel	19"	13"	$\frac{5}{8}$ "	1	15½" x 15" x 4"	4 Lbs.
SI-1550	Handi-Reel	25"	16"	$\frac{5}{8}$ "	1	19" x 18" x 6"	6 Lbs.

THROWING WEIGHT

PID Number: 401 165 847

- Rubber padded weight that can be easily attached to any type of hand line
- Easy to throw up and over inaccessible locations

Part Number	Carton Qty	Carton Size	Carton Weight
SI-9130	20	9" x 9" x 6½"	28 Lbs.



AUGER BIT

- Used by equipment installers, electricians and other construction trades when boring of holes is necessary
- Strong and rigid for smooth easy cutting
- Single twist construction with single-cutter head and side lip
- No outlining spur
- For use in a hand brace
- Stock sizes: $\frac{1}{4}$ " through $1\frac{1}{8}$ " diameter in $\frac{1}{16}$ " increments



Part Number	Size	Twist Length	Overall Length	Box Qty	Carton Qty	Carton Size	Carton Weight
SI-AB-250	$\frac{1}{4}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 4" x 2 $\frac{1}{2}$ "	32 Lbs
SI-AB-312	$\frac{5}{16}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 4 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ "	40 Lbs
SI-AB-375	$\frac{3}{8}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 4 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ "	48 Lbs
SI-AB-437	$\frac{7}{16}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 5 $\frac{1}{2}$ " x 5"	56 Lbs
SI-AB-500	$\frac{1}{2}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 6" x 5"	64 Lbs
SI-AB-562	$\frac{9}{16}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ " x 5 $\frac{1}{2}$ "	72 Lbs
SI-AB-625	$\frac{5}{8}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 7" x 5 $\frac{1}{2}$ "	80 Lbs
SI-AB-687	$1\frac{1}{16}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 7 $\frac{1}{2}$ " x 6"	88 Lbs
SI-AB-750	$\frac{3}{4}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 8" x 6"	96 Lbs
SI-AB-812	$1\frac{1}{8}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 8 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ "	104 Lbs
SI-AB-875	$\frac{7}{8}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 9" x 6 $\frac{1}{2}$ "	112 Lbs
SI-AB-937	$1\frac{5}{16}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 9 $\frac{1}{2}$ " x 7"	120 Lbs
SI-AB-1000	1"	12"	18"	40	160	18 $\frac{1}{2}$ " x 10" x 7"	128 Lbs
SI-AB-1062	$1\frac{1}{8}$ "	12"	18"	40	160	18 $\frac{1}{2}$ " x 10 $\frac{1}{2}$ " x 7 $\frac{1}{2}$ "	136 Lbs

BELLHANGER'S DRILL BIT

- Mainly used in telephone, broadband or other applications where wire installations are required
- High quality steel that will withstand rugged use
- A small hole is provided in the flute for pulling wire
- Stock sizes: $\frac{3}{16}$ " through $\frac{3}{4}$ " diameter in $\frac{1}{16}$ " increments



Part Number	Size	Twist Length	Overall Length	Flute Hole	Box Qty	Carton Qty	Carton Size	Carton Weight
SI-BD-187	$\frac{3}{16}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 3" x 2 $\frac{1}{2}$ "	31 Lbs.
SI-BD-250	$\frac{1}{4}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 3 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ "	41 Lbs.
SI-BD-312	$\frac{5}{16}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 4" x 2 $\frac{1}{2}$ "	52 Lbs.
SI-BD-375	$\frac{3}{8}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 4 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ "	62 Lbs.
SI-BD-437	$\frac{7}{16}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 5" x 5"	72 Lbs.
SI-BD-500	$\frac{1}{2}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 5 $\frac{1}{2}$ " x 5"	83 Lbs.
SI-BD-562	$\frac{9}{16}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 6" x 5 $\frac{1}{2}$ "	93 Lbs.
SI-BD-625	$\frac{5}{8}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 6 $\frac{1}{2}$ " x 5 $\frac{1}{2}$ "	103 Lbs.
SI-BD-687	$1\frac{1}{16}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 7" x 6"	114 Lbs.
SI-BD-750	$\frac{3}{4}$ "	6"	18"	$\frac{3}{32}$ " diameter, 3" from tip	30	120	18 $\frac{1}{2}$ " x 7 $\frac{1}{2}$ " x 6"	124 Lbs.